

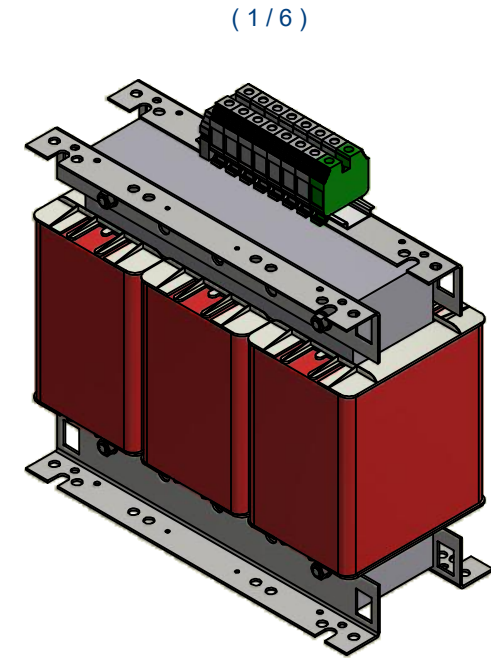
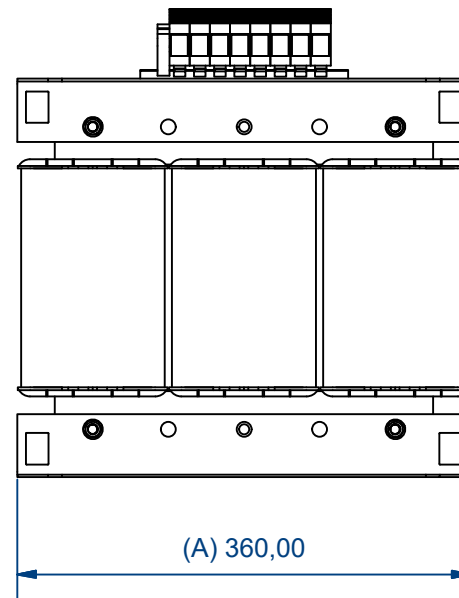
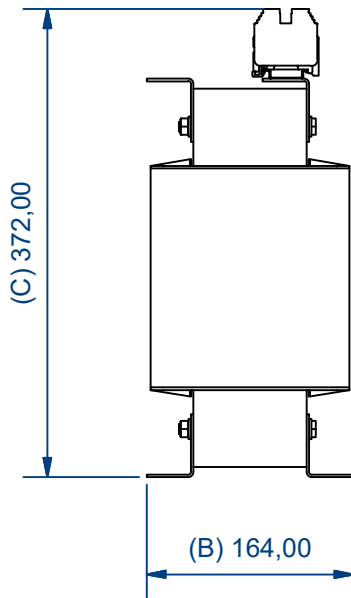


Connection (1/3)

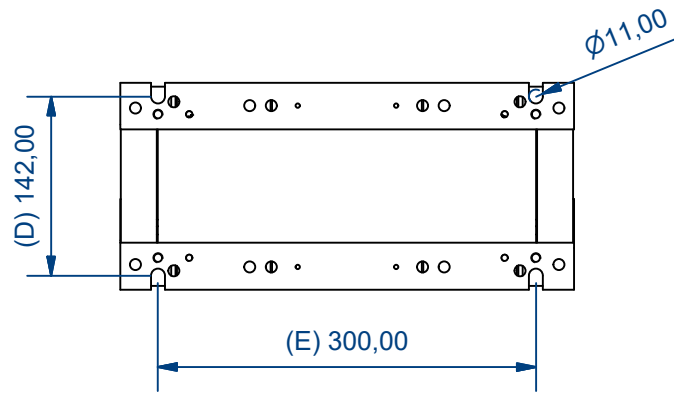

Characteristics									
IP	Vector Group	Rated power	Voltage Pri.	In Pri.	Pri. Connection	Voltage Sec.	In Sec.	Sec. Connection	Ground connection
00	YN0	25 kVA	400 V	36,08 A	Terminal wire up to 35 mm <sup>2</sup>	230 V	62,73 A	Terminal wire up to 35 mm <sup>2</sup>	Terminal wire up to 35 mm <sup>2</sup>
Drawn by: IVV-27/10/2023		Modified by: -		Approved by: AMR-27/10/2023		Replaces: PE.C.NOR.AUTX25.V01		Material: Generic	
				Description: AUTX25 Drawing		Surface treatment: RAL 7035		Weight: N/D	
Drawing reference: PE.C.NOR.AUTX25.V02		ERP reference: AUTX25		Distributed to:		Technical D. Commercial		Scale: 1 / 6	
						Customers D.		Page: 1 / 1	