

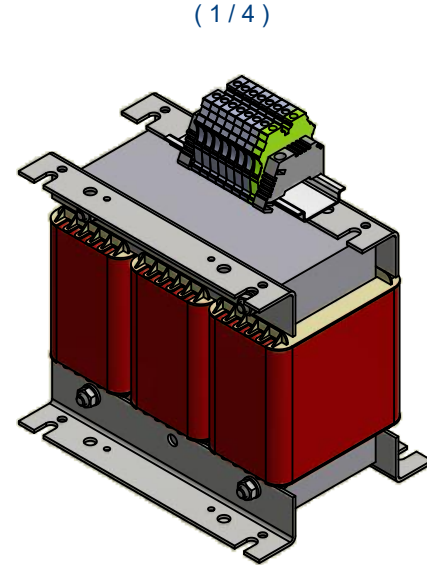
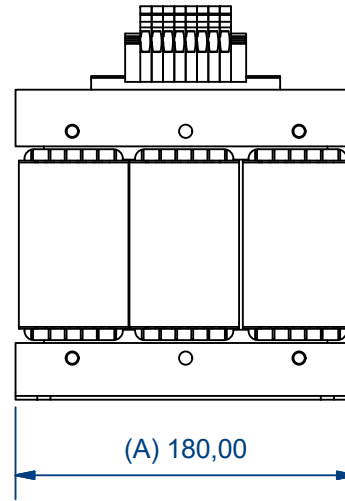
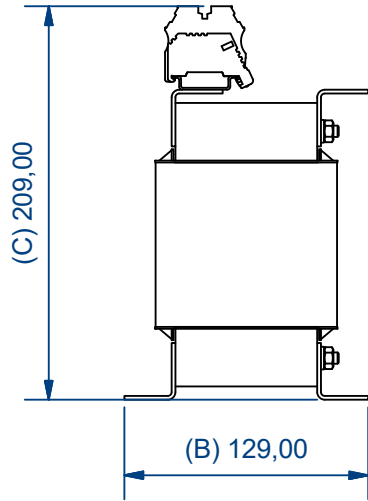
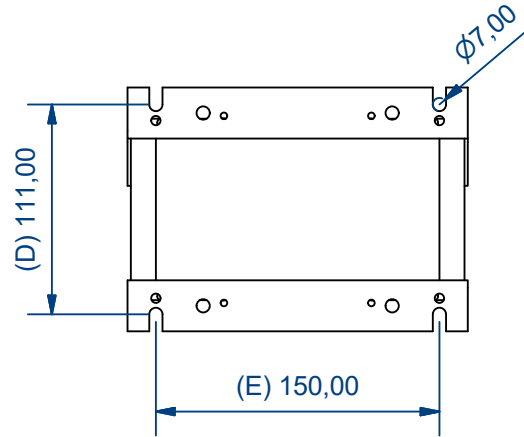


W2/230V
V2/230V
U2/230V
N2
W1/400V
V1/400V
U1/400V
GND

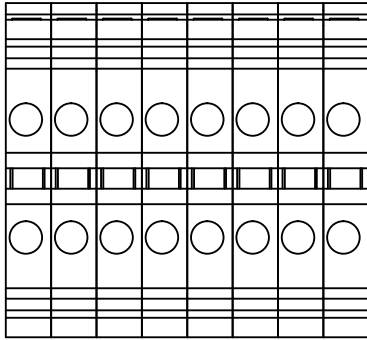

Characteristics									
IP	Vector Group	Rated power	Voltage Pri.	In Pri.	Pri. Connection	Voltage Sec.	In Sec.	Sec. Connection	Ground connection
00	YN0	3,15 kVA	400 V	4,54 A	Terminal wire up to 10 mm ²	230 V	7,90 A	Terminal wire up to 10 mm ²	Terminal wire up to 10 mm ²
Drawn by: IVV-24/10/2023		Modified by: -		Approved by: AMR-23/10/2023		Replaces: PE.C.NOR.AUTX3,15.V01		Material: RAL 7035	
							Surface treatment: RAL 7035		Weight: N/D
							Description: AUTX3,15 Drawing		Units: mm
Drawing reference: PE.C.NOR.AUTX3,15.V02			ERP reference: AUTX 3,15		Distributed to: Comercial		Technical D. Customers		Scale: 1 / 4
								Valid:	Page: 1 / 1