

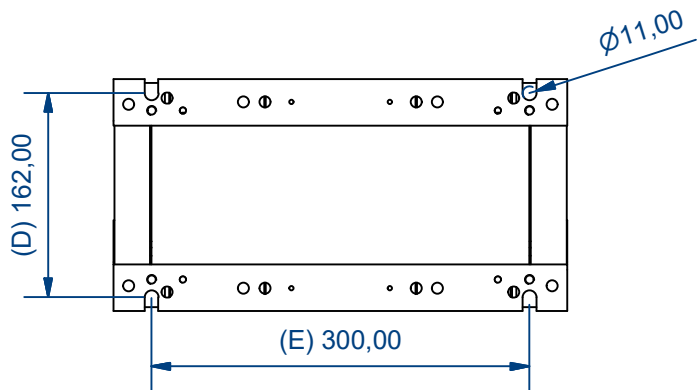
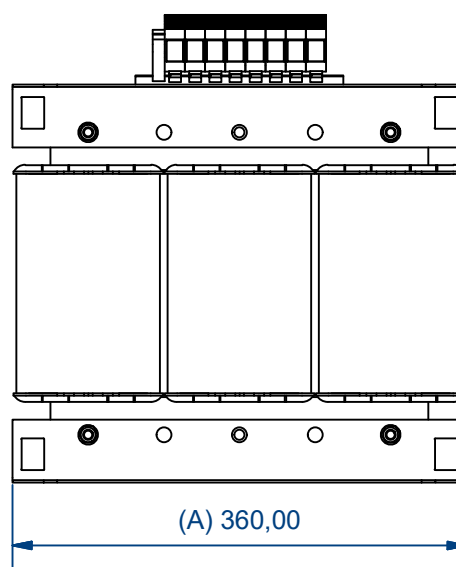



Connection (1/3)

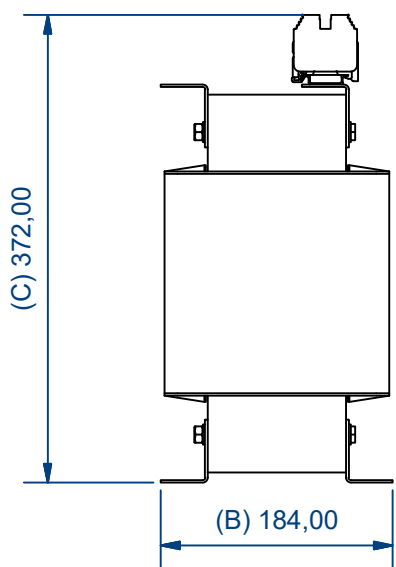

(1/6)

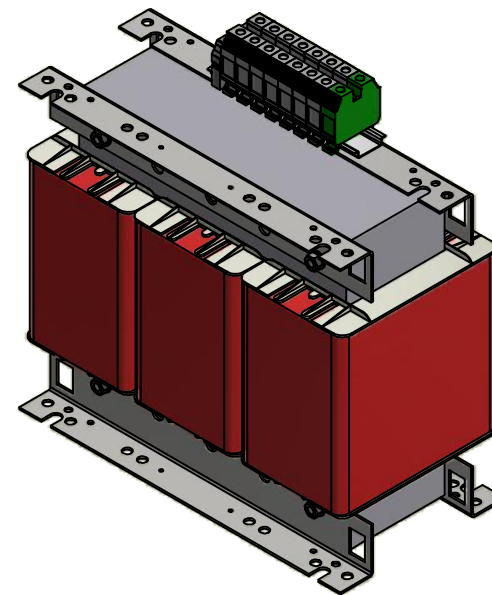

YN0



Characteristics									
IP	Vector Group	Rated power	Voltage Pri.	In Pri.	Pri. Connection	Voltage Sec.	In Sec.	Sec. Connection	Ground connection
00	YN0	31,5 kVA	400 V	45,47 A	Terminal wire up to 35 mm ²	230 V	79,07 A	Terminal wire up to 35 mm ²	Terminal wire up to 35 mm ²
Drawn by: IVV-27/10/2023		Modified by: -		Approved by: AMR-27/10/2023		Replaces: PE.C.NOR.AUTX31,5.V01		Material: Generic	
							Surface treatment: RAL 7035		Weight: N/D
									Units: mm
Drawing reference: PE.C.NOR.AUTX31,5.V02				ERP reference: AUTX31,5		Distributed to:		Technical D. Commercial D.	
							Customers		Scale: 1 / 6
									Page: 1 / 1