

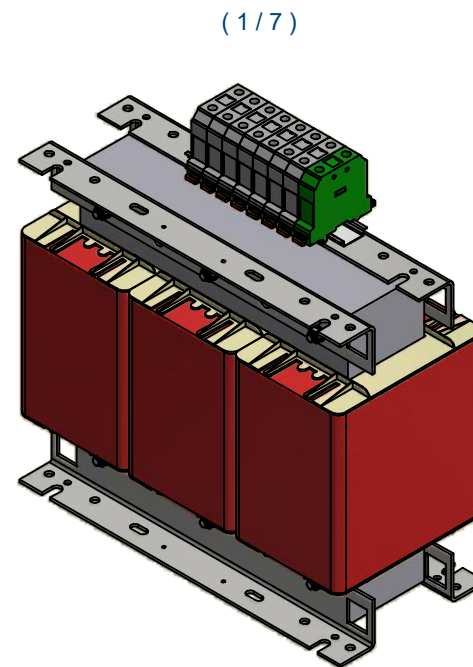
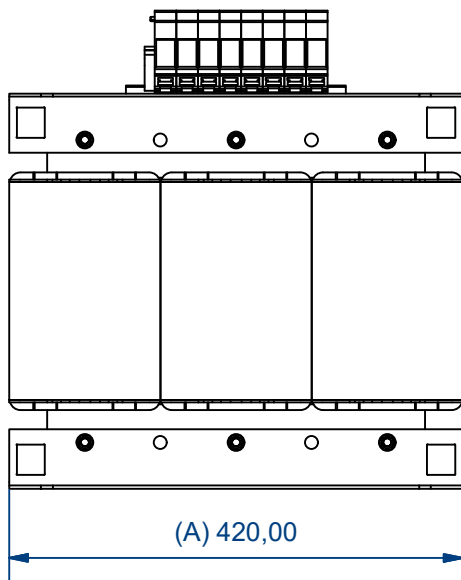
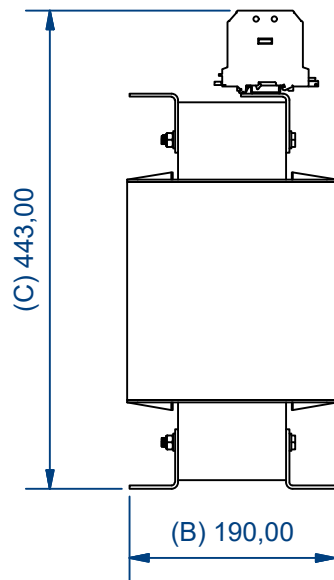


Connection (1/4)

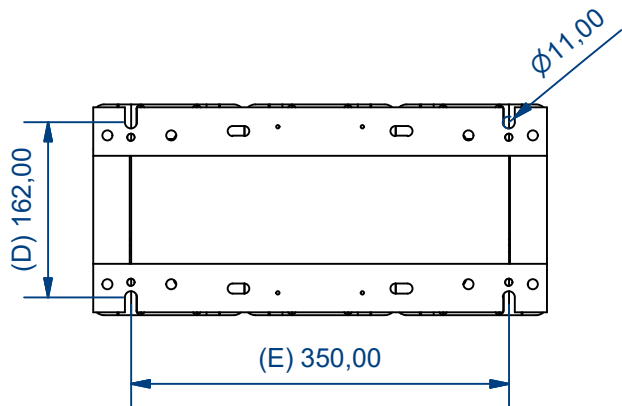

Characteristics										
IP	Vector Group	Rated power	Voltage Pri.	In Pri.	Pri. Connection	Voltage Sec.	In Sec.	Sec. Connection	Ground connection	
00	YN0	40 kVA	400 V	57,74 A	Terminal wire up to 50 mm ²	230 V	100,41 A	Terminal wire up to 50 mm ²	Terminal wire up to 50 mm ²	
Drawn by: IVV-30/10/2023		Modified by: -		Approved by: AMR-30/10/2023		Replaces: PE.C.NOR.AUTX40.V01		Material: Generic		
							Surface treatment: RAL 7035		Weight: N/D	
									Valid:	
Description: AUTX40 Drawing				Units: mm		Directory:				
Drawing reference: PE.C.NOR.AUTX40.V02			ERP reference: AUTX40		Distributed to:		Technical D. Commercial D.		Scale: 1 / 7	Page: 1 / 1