

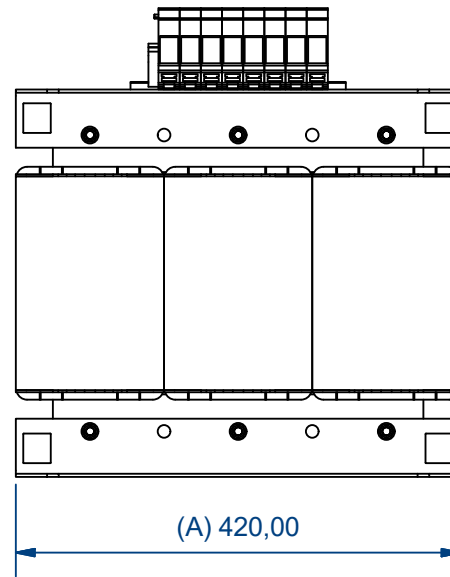
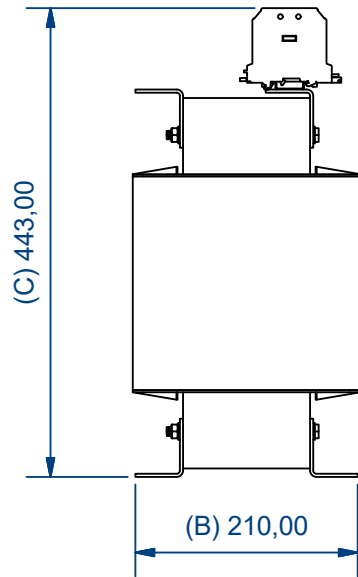


(1 / 7)

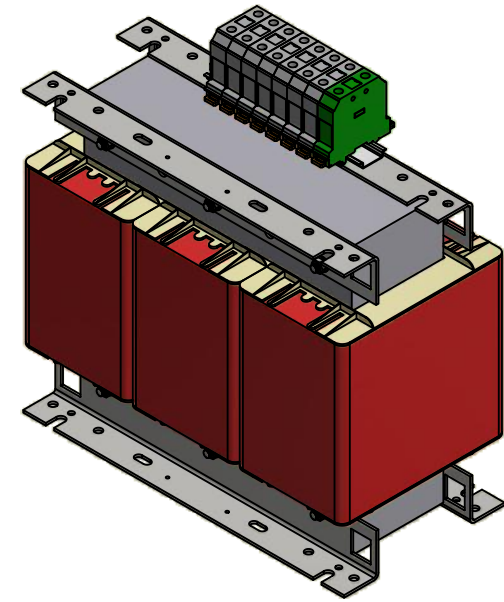

YN0



Characteristics									
IP	Vector Group	Rated power	Voltage Pri.	In Pri.	Pri. Connection	Voltage Sec.	In Sec.	Sec. Connection	Ground connection
00	YN0	50 kVA	400 V	72,17 A	Terminal wire up to 50 mm ²	230 V	125,51 A	Terminal wire up to 50 mm ²	Terminal wire up to 50 mm ²
Drawn by: IVV-30/10/2023		Modified by: -		Approved by: AMR-30/10/2023		Replaces: PE.C.NOR.AUTX50.V01		Material: Generic	
							Surface treatment: RAL 7035		Weight: N/D
									Valid:
Description: AUTX50 Drawing				Units: mm		Directory:			
Drawing reference: PE.C.NOR.AUTX50.V02				ERP reference: AUTX50		Distributed to:		Technical D. Commercial	
							Scale: 0,14 : 1		Page: 1 / 1