

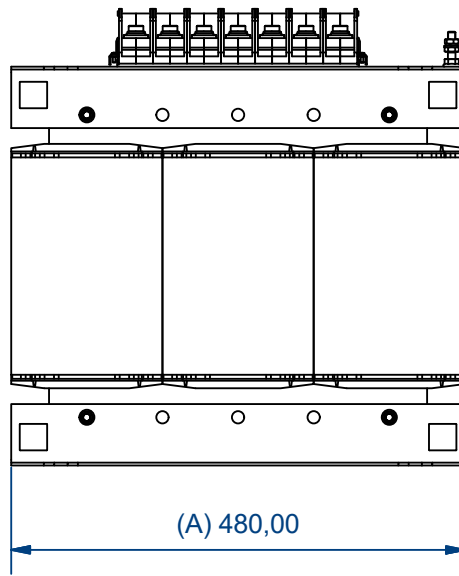
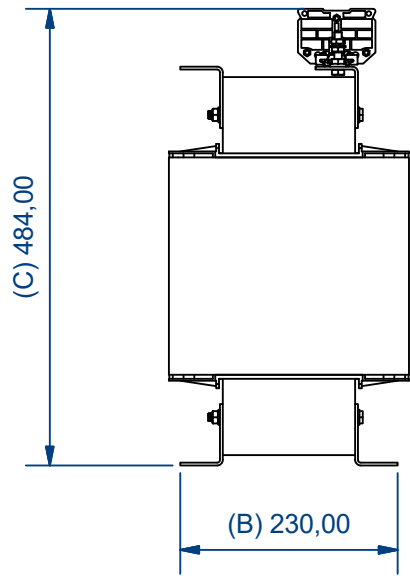


(1/7)

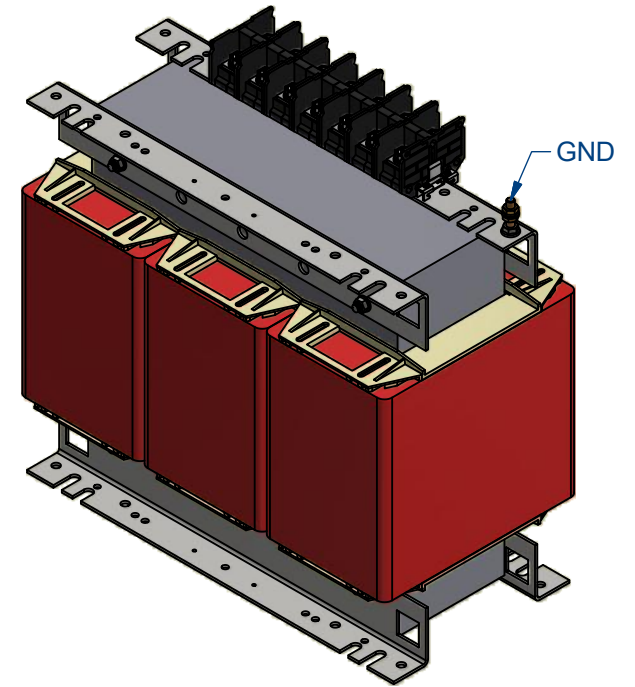

**YN0**

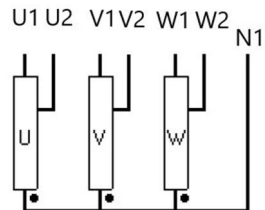

Characteristics									
IP	Vector Group	Rated power	Voltage Pri.	In Pri.	Pri. Connection	Voltage Sec.	In Sec.	Sec. Connection	Ground connection
00	YN0	80 kVA	400 V	115,47 A	Terminal M10 Max. width 30mm	230 V	200,82 A	Terminal M10 Max. width 30mm	M8 brass stud
Drawn by: IVV-30/10/2023		Modified by: -		Approved by: AMR-30/10/2023		Replaces: PE.C.NOR.AUTX80.V01		Material: Generic	
							Surface treatment: RAL 7035		Weight: N/D
							Description: AUTX80 Drawing		Units: mm
Drawing reference: PE.C.NOR.AUTX80.V02				ERP reference: AUTX80		Distributed to:		Technical D.	Scale: 1 / 8
						Commercial D.		Customers	Page: 1 / 1