

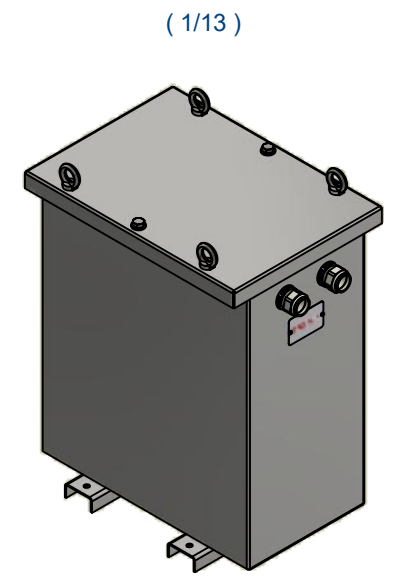
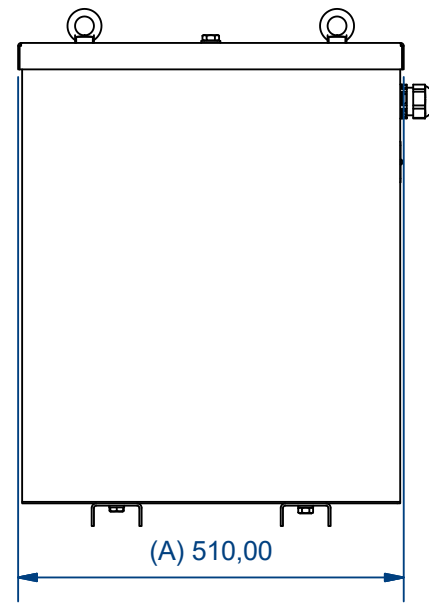
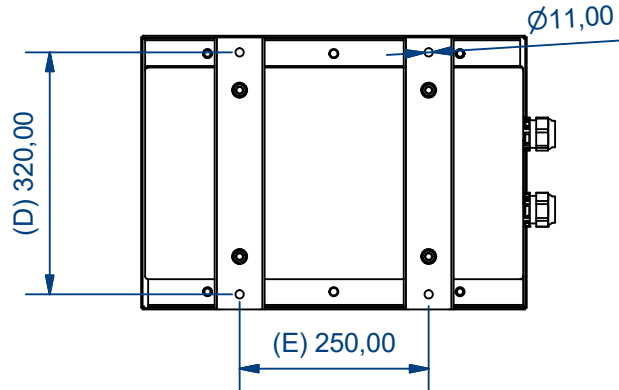
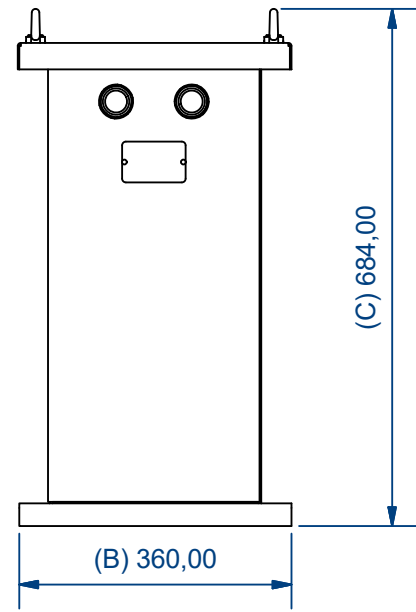


Connexion (1/2)

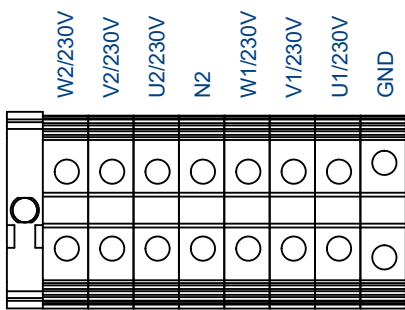

Characteristics											
IP	Vector Group	Rated power	Voltage Pri.	In Pri.	Pri. Connection	Voltage Sec.	In Sec.	Sec. Connection	Ground connection		
54	YN0	16 kVA	400 V	23,1 A	Terminal wire up to 16 mm ²	230 V	40,2 A	Terminal wire up to 16 mm ²	Terminal wire up to 16 mm ²		
Drawn by: OPS-04/01/2024		Modified by: -		Approved by: AMR-16/03/2023		Replaces: -		Material:			
						Surface treatment: N/D		Weight: N/D			
								Valid: Yes			
				Description: AUTZ16 Drawing				Units: mm		Directory:	
				Drawing reference: PE.C.NOR.AUTZ16.V01		ERP reference: AUTZ16		Distributed to:		Technical D. Commercial D.	
						Customers		Page: 1 / 1			