

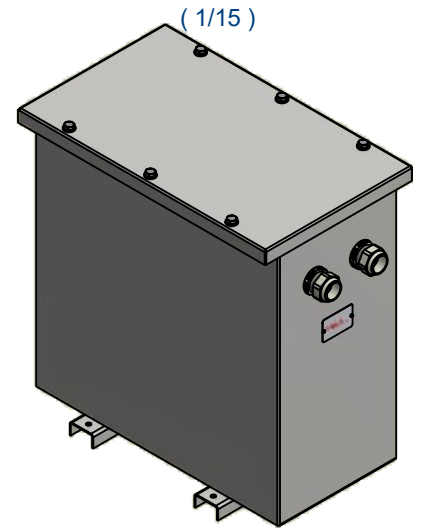
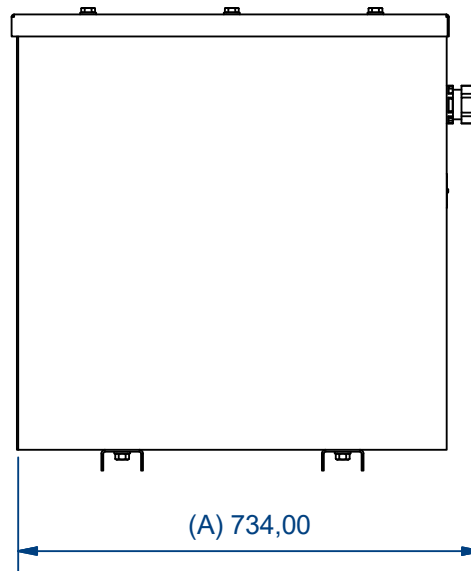
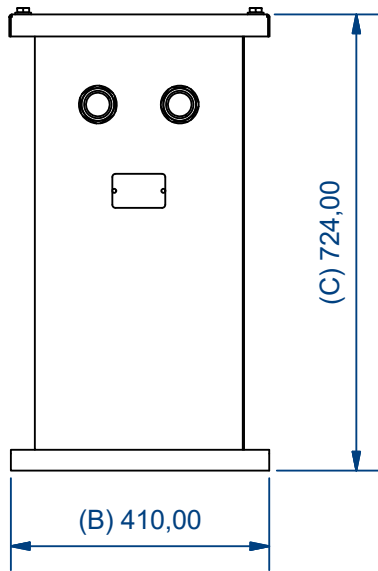
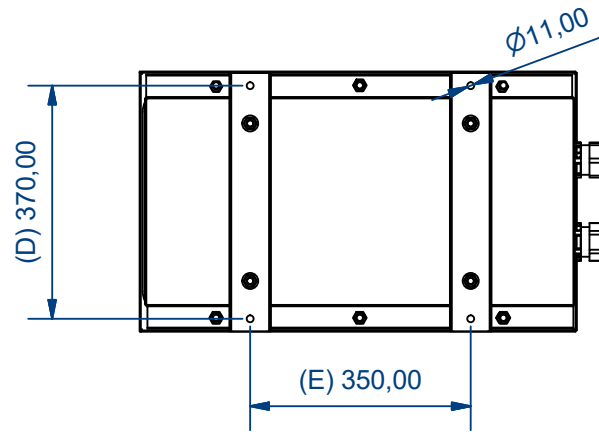


Connexion (1/4)

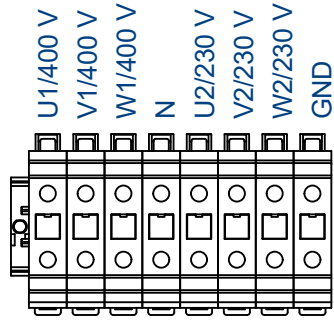

YN0



| Characteristics | | | | | | | | | | |
|-----------------------------|--------------|-------------------|--------------|--------------------------------|--|---|----------|--|--|-----------------|
| IP | Vector Group | Rated power | Voltage Pri. | In Pri. | Pri. Connection | Voltage Sec. | In Sec. | Sec. Connection | Ground connection | |
| 54 | YN0 | 40 kVA | 400 V | 57,74 A | Terminal wire up to 50 mm ² | 230 V | 100,41 A | Terminal wire up to 50 mm ² | Terminal wire up to 50 mm ² | |
| Drawn by: OPS-04/01/2024 | | Modified by: - | | Approved by: AMR-04/01/2024 | | Replaces: | | Material: | | |
| | | | | | | Description: AUTZ40 Drawing | | Units: mm | | Directory: |
| | | | | | | Drawing reference: PE.C.NOR.AUTZ50.V01 | | ERP reference: AUTZ40 | | Distributed to: |