






Connexion ( 1/4 )

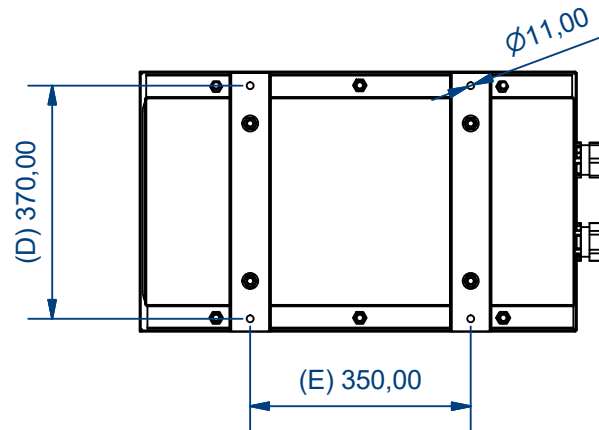


AUTZ63 Transformer ( 1/10 )

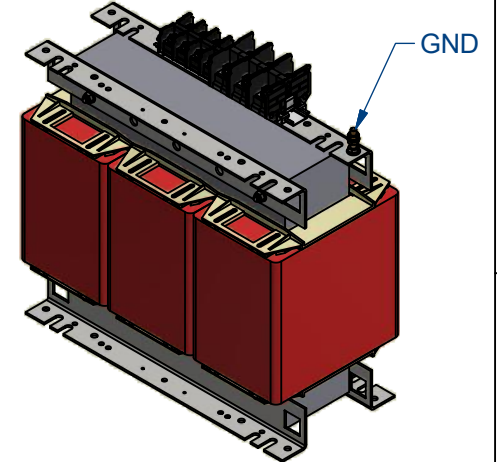

AUTZ63 Enclosure (1/15)

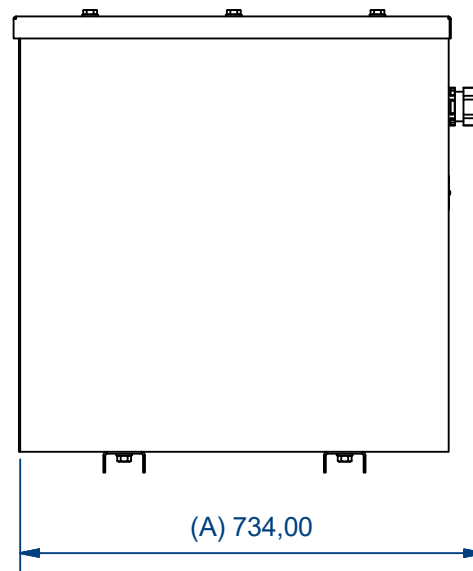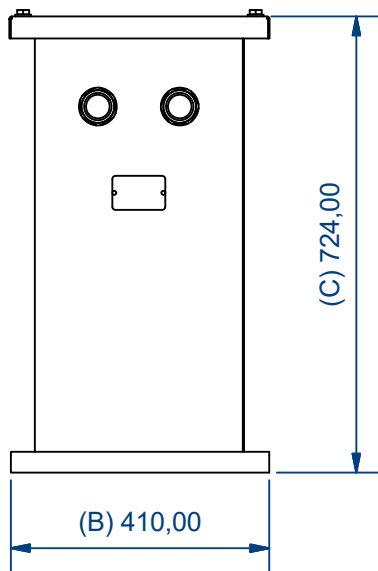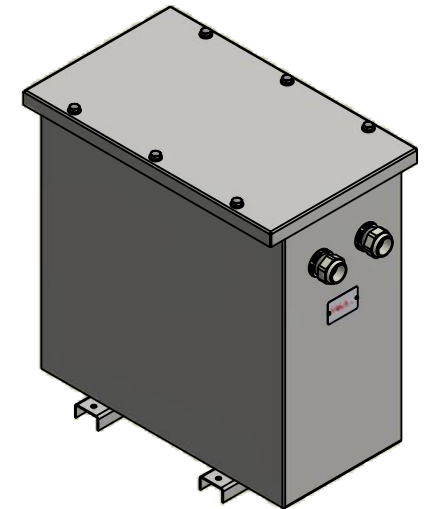

YN0



Characteristics										
IP	Vector Group	Rated power	Voltage Pri.	In Pri.	Pri. Connection	Voltage Sec.	In Sec.	Sec. Connection	Ground connection	
54	YN0	63 kVA	400 V	90,94 A	Terminal M8 width 23 mm	230 V	158,14 A	Terminal M10 width 30 mm	M8 brass stud	
Drawn by: OPS-04/01/2024		Modified by: -		Approved by: AMR-04/01/2024		Replaces:		Material:		
Surface treatment: N/D		Weight: 67,431 kg		Valid: Yes						
						Description: AUTZ63 Drawing		Units: mm		Directory:
						Distributed to:		Technical D.		Scale: 1 / 12
Drawing reference: PE.C.NOR.AUTZ63.V01				ERP reference: AUTZ63		Commercial D.		Customers		