

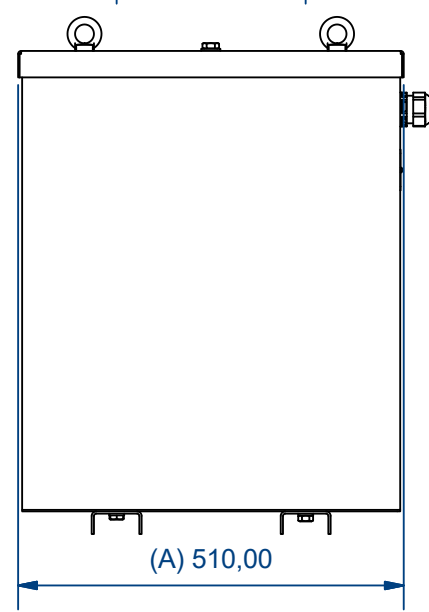
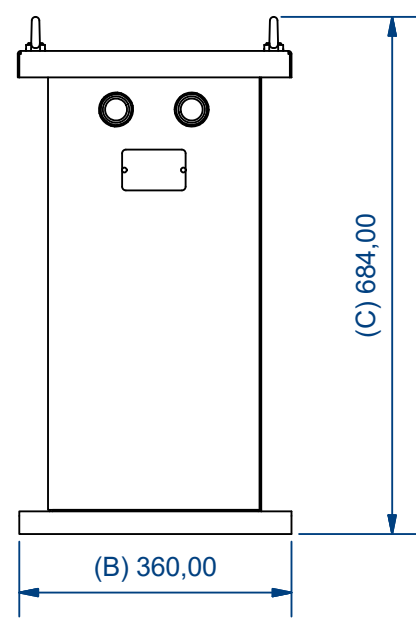


Connexion (3/5)



(1/13)

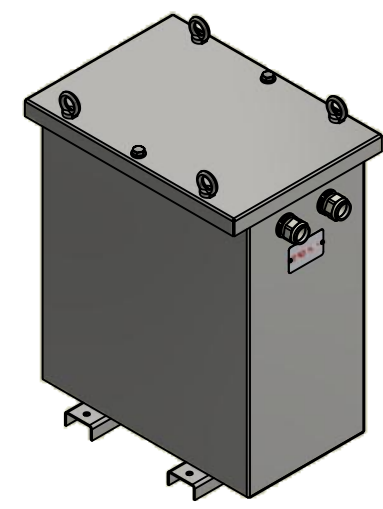

Characteristics									
IP	Vector Group	Rated power	Voltage Pri.	In Pri.	Pri. Connection	Voltage Sec.	In Sec.	Sec. Connection	Ground connection
54	YN0	8 kVA	400 V	11,55 A	Terminal wire up to 16 mm ²	230 V	20,06 A	Terminal wire up to 16 mm ²	Terminal wire up to 16 mm ²
Drawn by: OPS-04/01/2024		Modified by: -		Approved by: AMR-16/03/2023		Replaces: -		Material:	
						Description: AUTZ8 Drawing		Units: mm	
						Distributed to:		Technical D.	
Drawing reference: PE.C.NOR.AUTZ8.V01				ERP reference: AUTZ8		Commercial D.		Customers	
								1 / 10	
								1 / 1	

D