

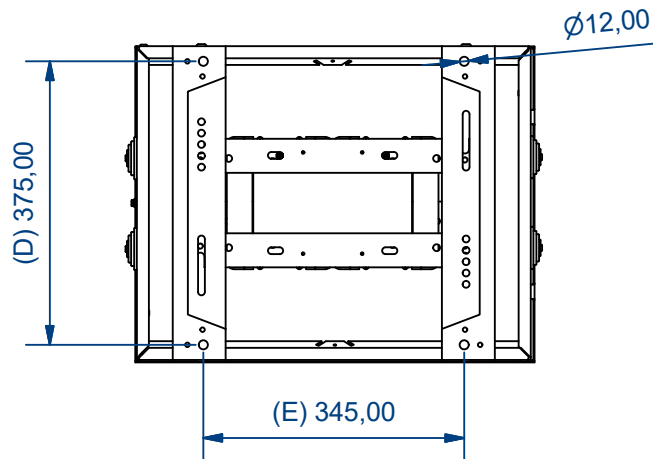
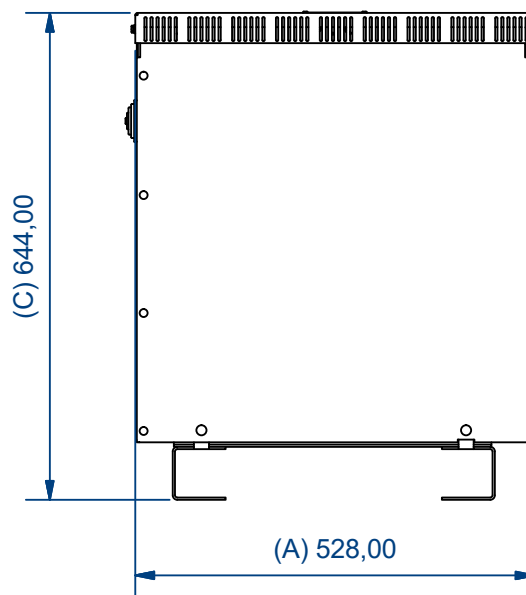


Connexion (1/2)

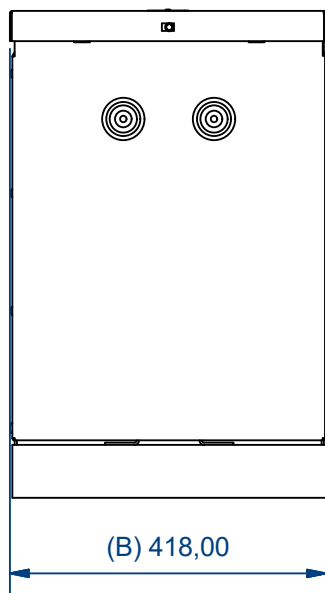

(1/12)

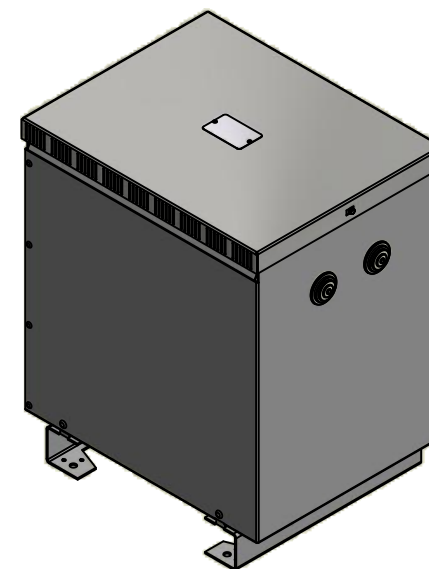

| Characteristics | | | | | | | | | | | |
|-----------------------------|--------------|-------------------|--------------|---|--|--------------|------------------------|--|--|----------------|---------------|
| IP | Vector Group | Rated power | Voltage Pri. | In Pri. | Pri. Connection | Voltage Sec. | In Sec. | Sec. Connection | Ground connection | | |
| 23 | - | 8 kVA | 230 V | 34,8 A | Terminal wire up to 35 mm ² | 230 V | 34,8 A | Terminal wire up to 35 mm ² | Terminal wire up to 35 mm ² | | |
| Drawn by: OPS-09/01/2024 | | Modified by: - | | Approved by: AMR-09/01/2024 | | Replaces: | | Material: Generic | Surface treatment: N/D | Weight: N/D | Valid: |
| | | | | Description: TKW8 Drawing | | | | | Units: mm | Directory: | |
| | | | | Drawing reference: PE.C.NOR.TKW8.V01 | | | ERP reference: TKW8 | | Distributed to: | Technical D. | Commercial D. |