
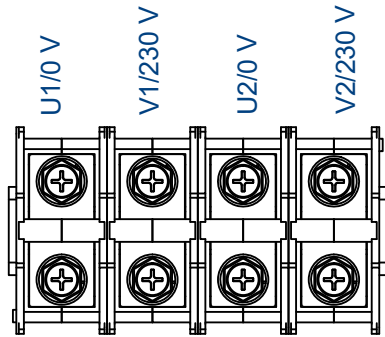





1 2 3 4 5 6 7 8





Connexion (1/3)

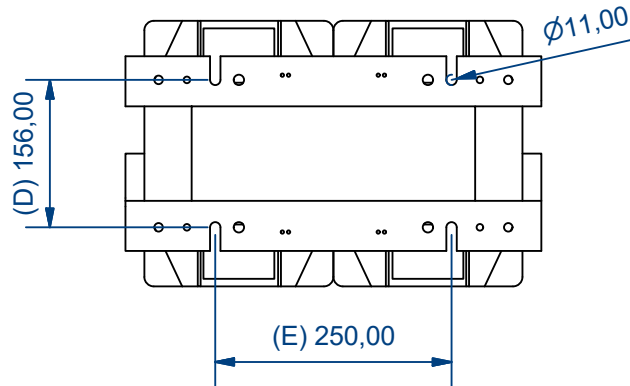

(1 / 9)

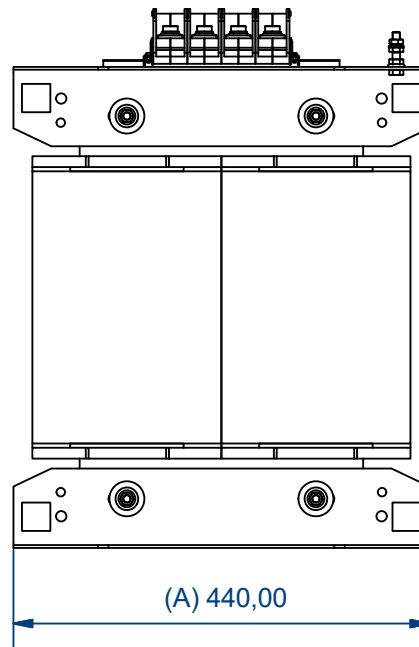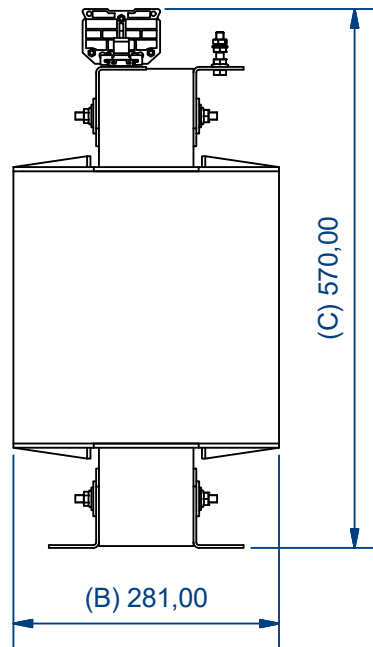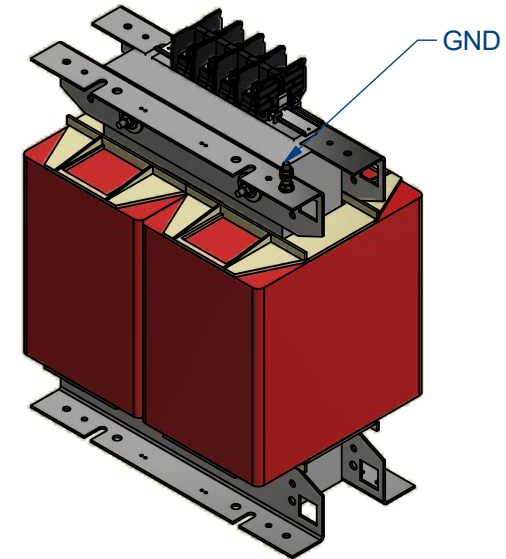

Characteristics									
IP	Rated power	Voltage Pri.	In Pri.	Pri. Connection	Voltage Sec.	In Sec.	Sec. Connection	Ground connection	
00	31,5 kVA	230 V	137 A	M10 Terminal Max. width 30mm	230 V	137 A	M10 Terminal Max. width 30mm	M8 Brass stud	
Drawn by: OPS-09/02/2024		Modified by: -		Approved by: AMR-09/02/2024		Replaces:		Material: Generic	
						Surface treatment: N/D		Weight: 40,020 kg	
				Description: TKX31,5 Drawing			 Units: mm		Directory:
				Drawing reference: PE.C.NOR.TKX31,5.V01		ERP reference: TKX31,5		Distributed to:	
							Scale: 1 / 8	Page: 1 / 1	

1 2 3 4 5 6 7 8