



1 2 3 4 5 6 7 8

A


A



Connection ( 1/2 )


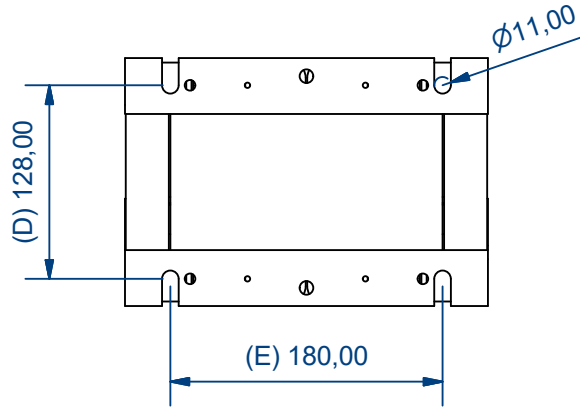


( 1/4 )

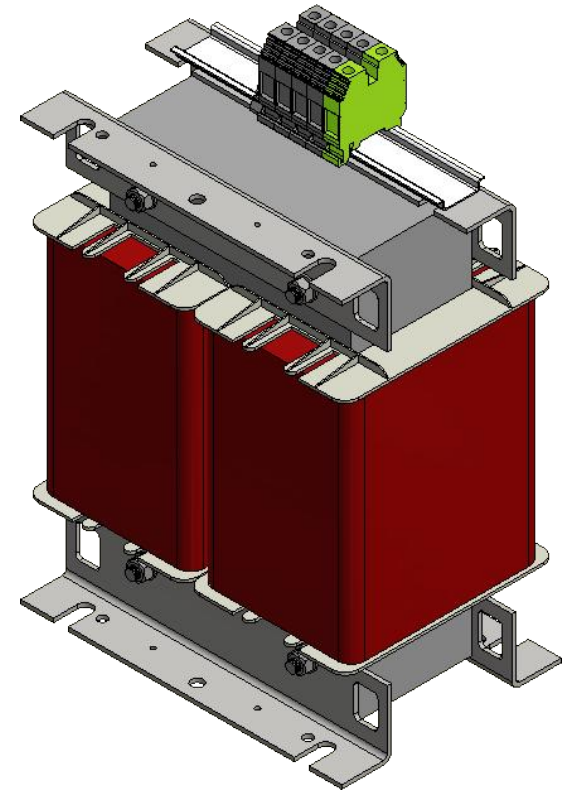

B

B

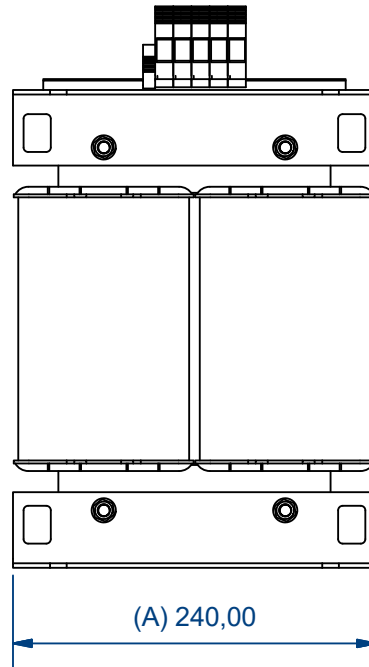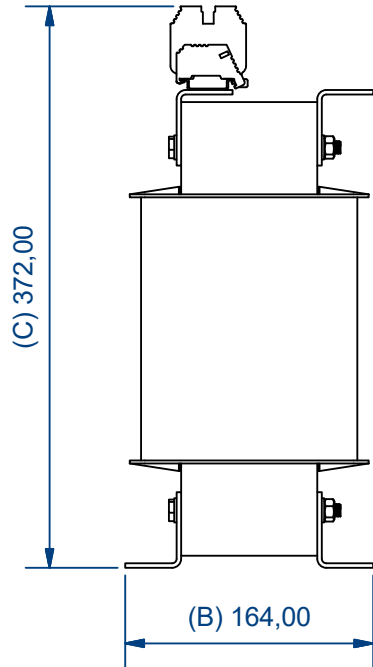

C

C

D

D

Characteristics											
IP	Vector Group	Rated power	Voltage Pri.	In Pri.	Pri. Connection	Voltage Sec.	In Sec.	Sec. Connection	Ground connection		
00	-	5 kVA	230 V	21.74 A	Terminal wire up to 16 mm <sup>2</sup>	230 V	21.74 A	Terminal wire up to 16 mm <sup>2</sup>	Terminal wire up to 16 mm <sup>2</sup>		
Drawn by: OPS-05/01/2024		Modified by: -		Approved by: OPS-05/01/2024		Replaces:		Material:			
								Surface treatment: N/D			
								Weight: N/D			
								Valid:			
				Description: TKX5 Drawing				Units: mm		Directory:	
				Drawing reference: PE.C.NOR.TKX5.V02		ERP reference: TKX5		Distributed to:		Technical D. Commercial D.	
								Customers		Page: 1 / 1	

1 2 3 4 5 6 7 8