

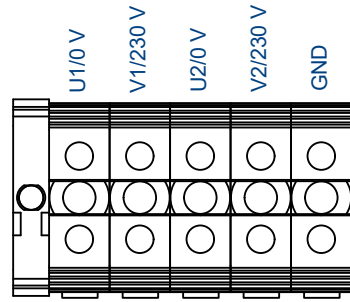
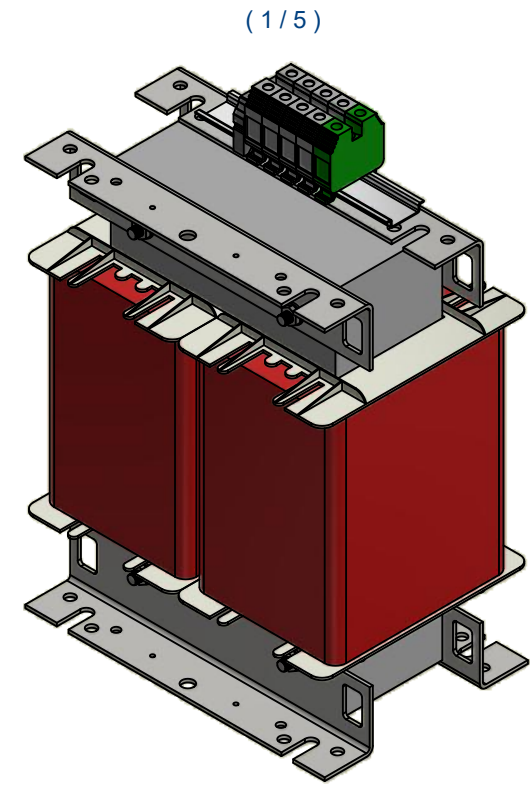
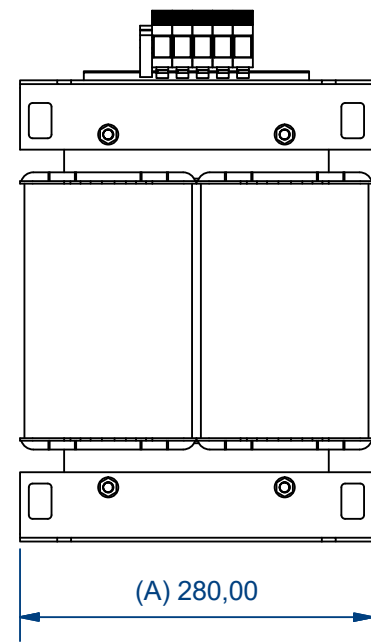


1 2 3 4 5 6 7 8

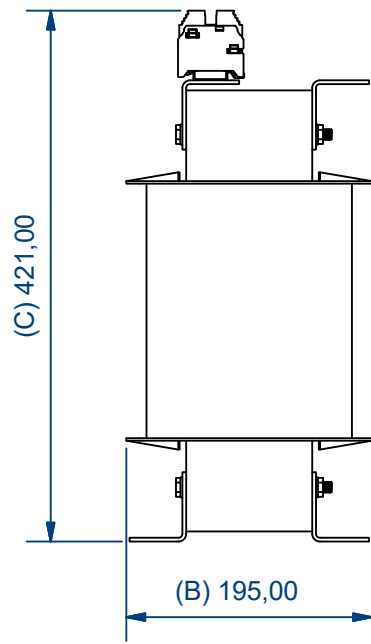

Connexion ( 1/2 )

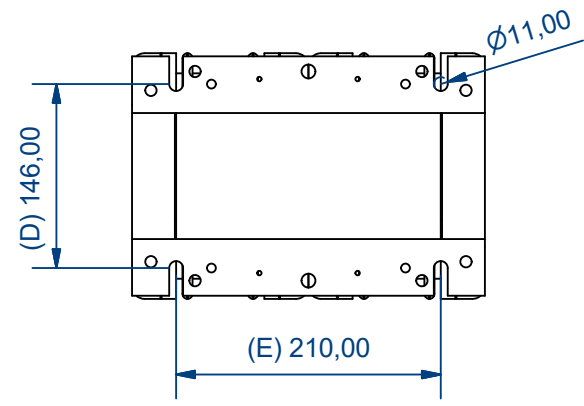

Characteristics												
IP	Vector Group	Rated power	Voltage Pri.	In Pri.	Pri. Connection	Voltage Sec.	In Sec.	Sec. Connection	Ground connection			
00	-	8 kVA	230 V	34,8 A	Terminal wire up to 35 mm <sup>2</sup>	230 V	34,8 A	Terminal wire up to 35 mm <sup>2</sup>	Terminal wire up to 35 mm <sup>2</sup>			
Drawn by: OPS-05/01/2024		Modified by: -		Approved by: OPS-05/01/2024		Replaces:		Material: Generic	Surface treatment: N/D	Weight: N/D	Valid:	
<b>POLYLUX</b>				Description: TKX8 Drawing						Units: mm	Directory:	
				Drawing reference: PE.C.NOR.TKX8.V01			ERP reference: TKX8			Distributed to:	Technical D.	Commercial D.

1 2 3 4 5 6 7 8