

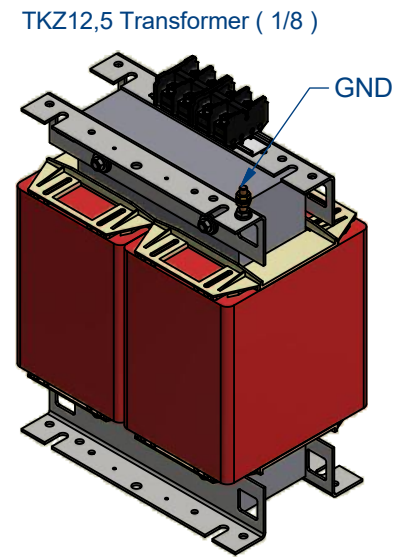
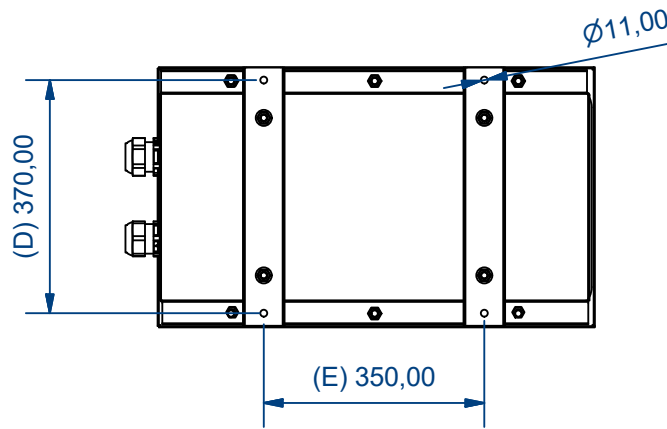



Connexion ( 1/2 )

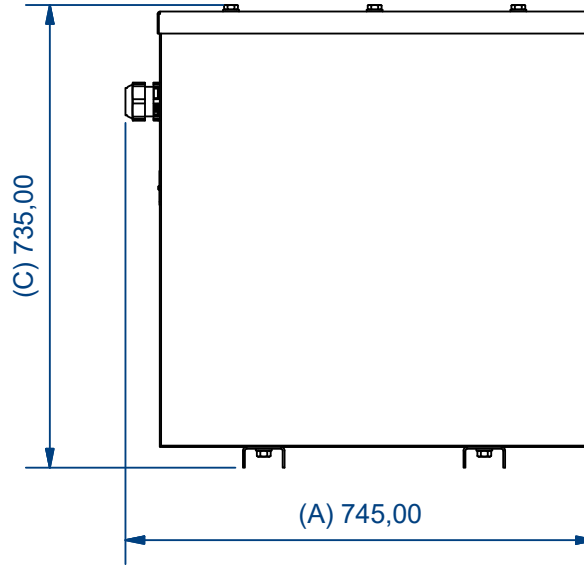

TKZ12,5 Transformer ( 1/8 )

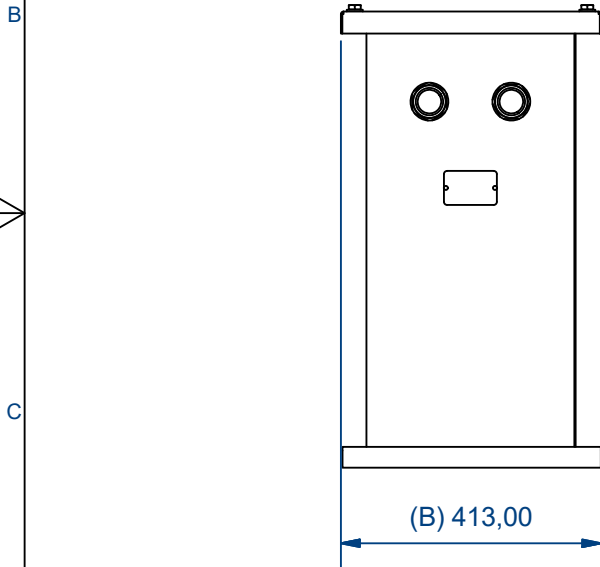

TKZ12,5 Enclosure ( 1/18 )

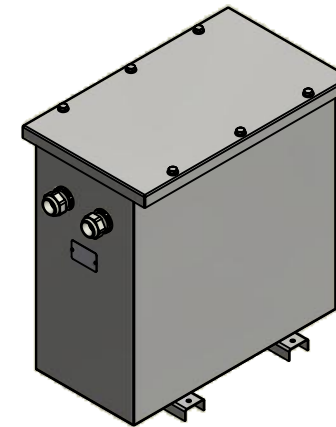

Characteristics									
IP	Rated power	Voltage Pri.	In Pri.	Pri. Connection	Voltage Sec.	In Sec.	Sec. Connection	Ground connection	
54	12,5 kVA	230 V	54,3 A	M8 Terminal Max. width 22,5mm	230 V	54,3 A	M8 Terminal Max. width 22,5mm	M8 Brass stud	
Drawn by: OPS-09/01/2024		Modified by: -		Approved by: AMR-09/01/2024		Replaces:		Material: Generic	
						Surface treatment: N/D		Weight: N/D	
						Description: TKZ12,5 Drawing			
Drawing reference: PE.C.NOR.TKZ12,5.V01			ERP reference: TKZ12,5		Distributed to:		Technical D. Commercial D.	Scale: 1 / 12	
							Customers		Page: 1 / 1