

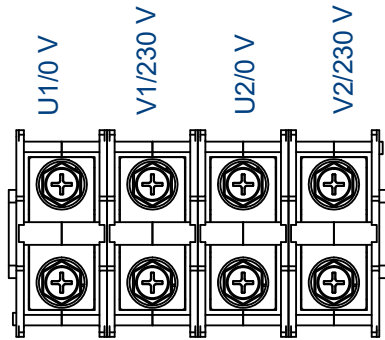
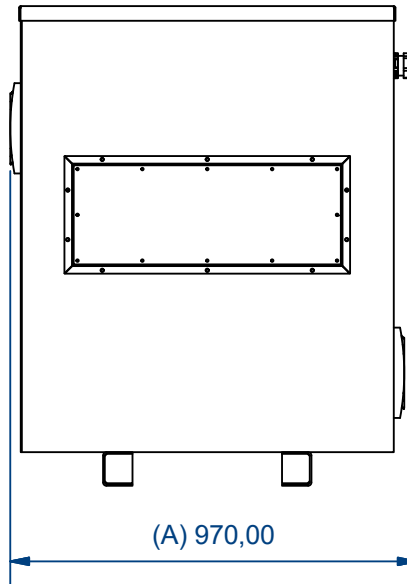
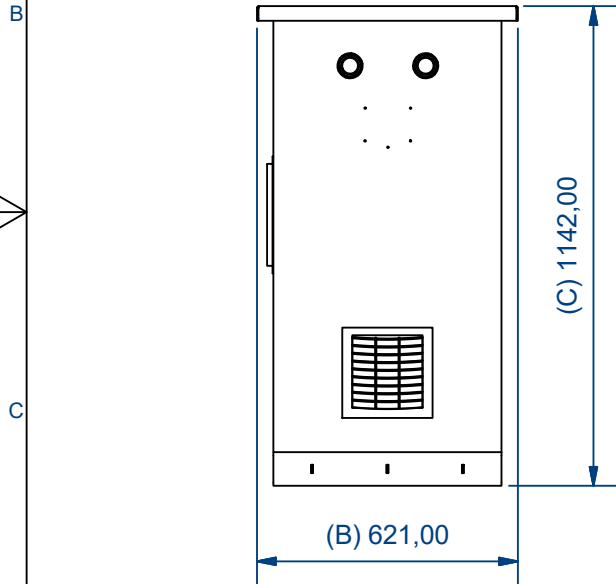



1 2 3 4 5 6 7 8

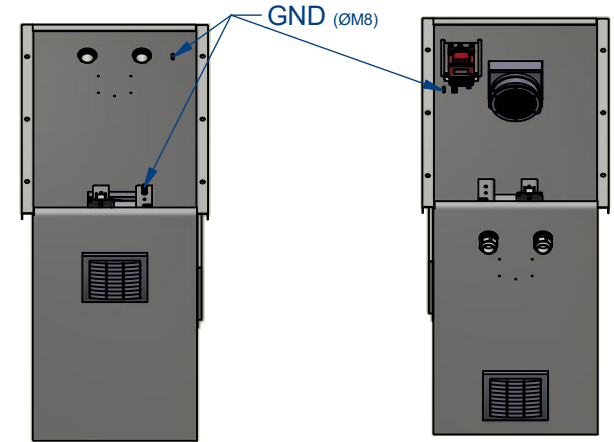

Connexion ( 1/3 )

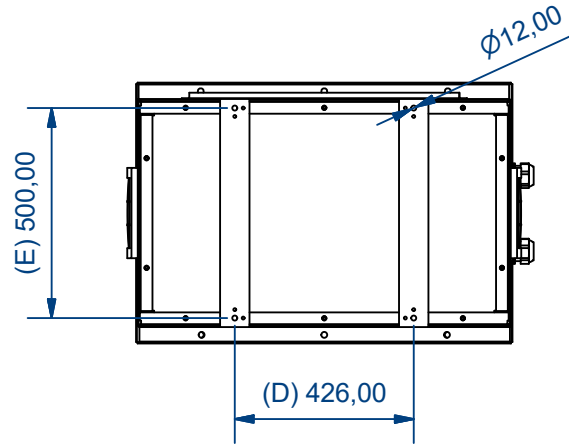


( 1/25 )

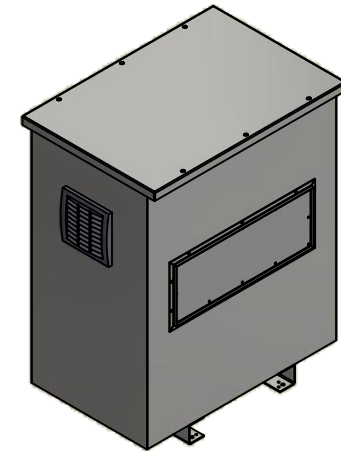

C

D

Characteristics								
IP	Rated power	Voltage Pri.	In Pri.	Pri. Connection	Voltage Sec.	In Sec.	Sec. Connection	Ground connection
54	31,5 kVA	230 V	137 A	M10 Terminal Max. width 30mm	230 V	137 A	M10 Terminal Max. width 30mm	M8 Brass stud
Drawn by: OPS-13/02/2024		Modified by: -		Approved by: AMR-13/02/2024		Replaces:		Material: Generic
						Surface treatment: N/D		Weight: N/D
						Description: TKZ31,5 Drawing		Units: mm
Drawing reference: PE.C.NOR.TKZ31,5.V01			ERP reference: TKZ31,5		Distributed to:		Scale: 1 / 18	
					Technical D.		Page: 1 / 1	
					Commercial D.		Customers	

1 2 3 4 5 6 7 8