

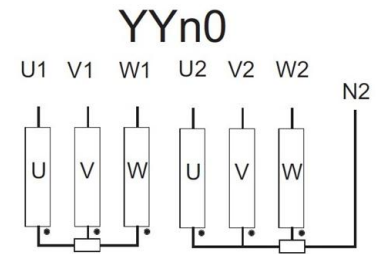
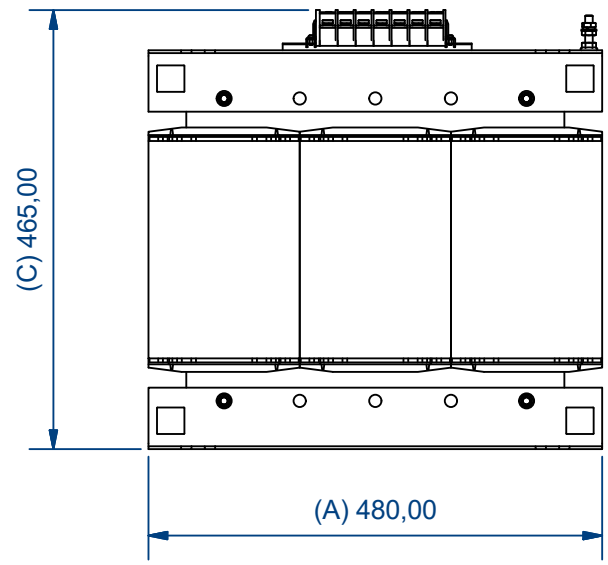


(1 / 10)

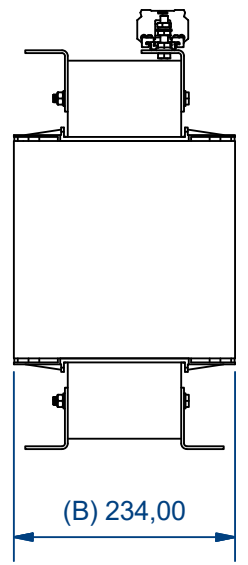

Characteristics									
IP	Vector Group	Rated power	Voltage Pri.	In Pri.	Pri. Connection	Voltage Sec.	In Sec.	Sec. Connection	Ground connection
00	Yyn0	25 kVA	400 V	36.1 A	Terminal M6 Max. width =16mm	400 V	36.1 A	Terminal M6 Max. width =16mm	M8 Brass Stud
Drawn by: SB-23/02/2023		Modified by: -		Approved by: MMB-23/02/2023		Replaces: PE.C.NOR.TTX25.V01		Material:	
				Description: TTX25 Drawing		Surface treatment:		Weight: N/D	
Drawing reference: PE.C.NOR.TTX25.V02		ERP reference: TTX25		Distributed to:		Technical D. Commercial D.		Scale: 1/8	
						Costumers		Page: 1 / 1	

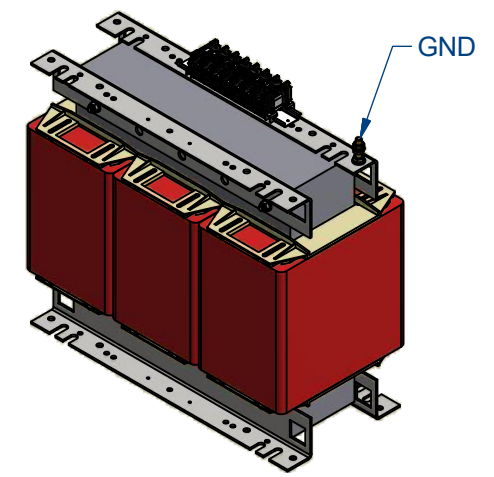