

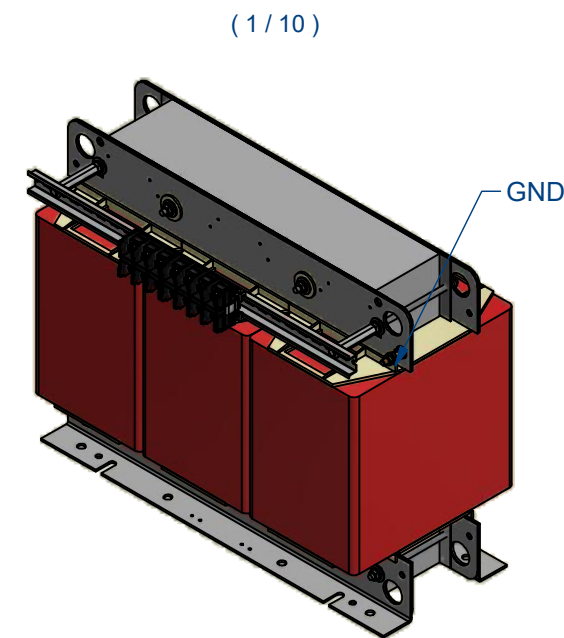
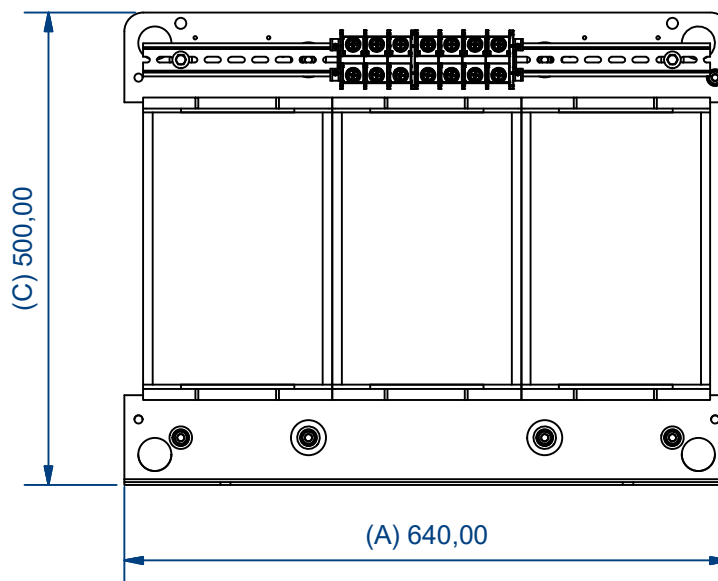
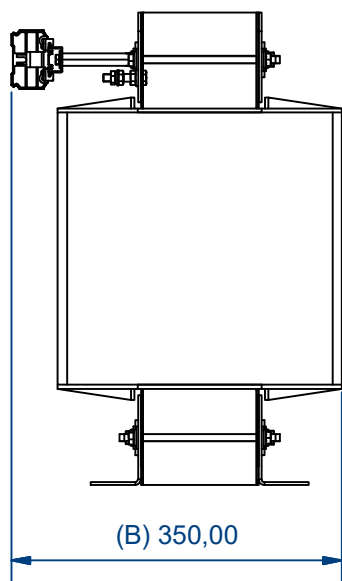


Connection (2/5)

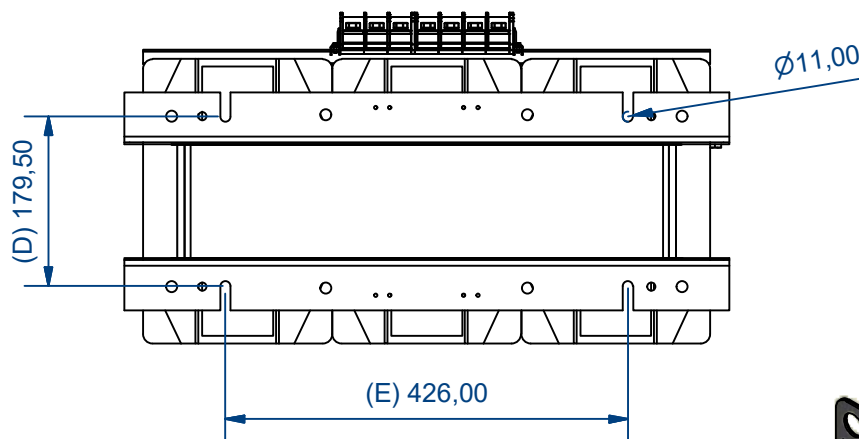

Characteristics									
IP	Vector Group	Rated power	Voltage Pri.	In Pri.	Pri. Connection	Voltage Sec.	In Sec.	Sec. Connection	Ground connection
00	YYN0	50 kVA	400 V	72,17 A	M8 Terminal screw Max. Width 22 mm	400 V	72,17 A	M8 Terminal screw Max. Width 22 mm	M8 Brass stud
Drawn by: OPS-15/11/2023		Modified by: -		Approved by: AMR-15/11/2023		Replaces:		Material: Generic	
							Surface treatment: N/D		Weight: N/D
							Description: TTX50 Drawing		Units: mm
Drawing reference: PE.C.NOR.TTX50.V01				ERP reference: TTX50		Distributed to:		Technical D.	Scale: 1 / 8
						Commercial D.		Customers	Page: 1 / 1