

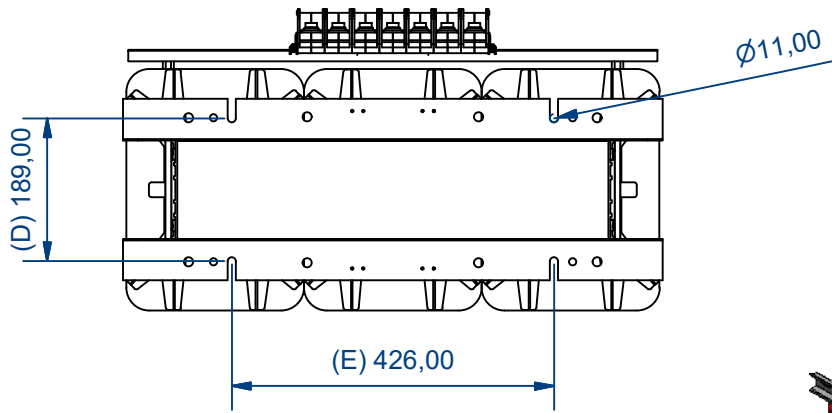

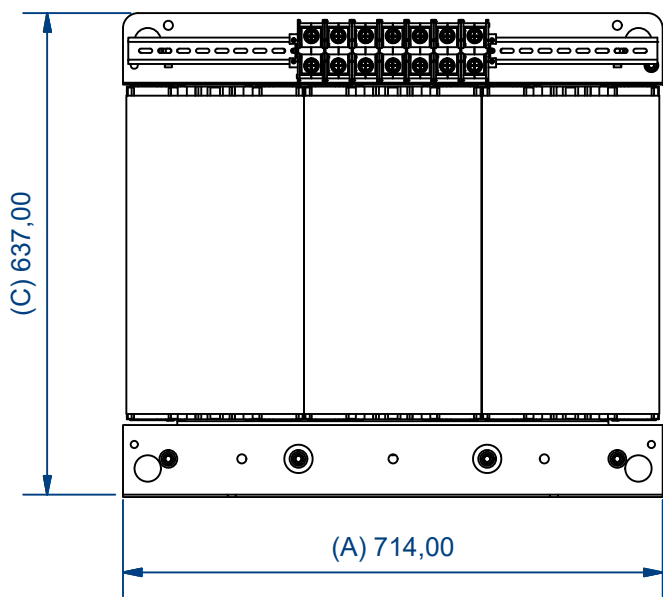


Connection (2/7)

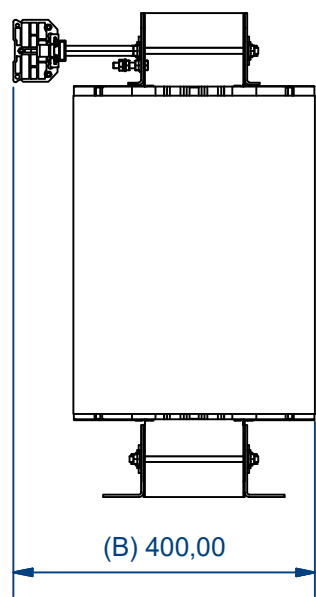

(1 / 12)

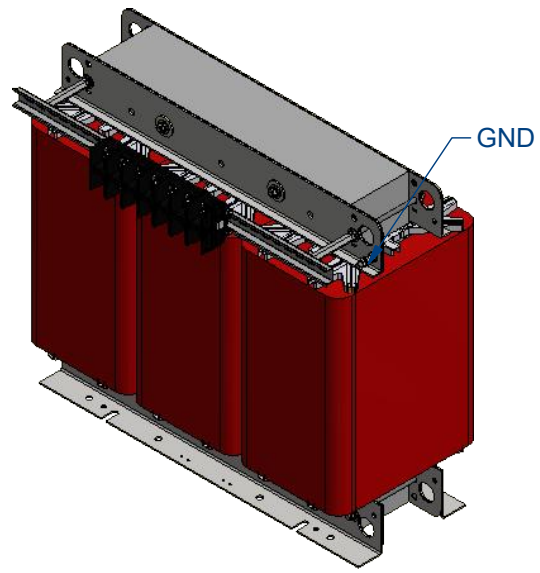

Characteristics											
IP	Vector Group	Rated power	Voltage Pri.	In Pri.	Pri. Connection	Voltage Sec.	In Sec.	Sec. Connection	Ground connection		
00	YYN0	80 kVA	400 V	115,47 A	M10 Terminal screw Max. Width 30 mm	400 V	115,47 A	M10 Terminal screw Max. Width 30 mm	M8 Brass stud		
Drawn by: OPS-22/11/2023		Modified by: -		Approved by: AMR-22/11/2023		Replaces:		Material: Generic	Surface treatment: N/D	Weight: N/D	Valid:
						Description: TTX80 Drawing				Units: mm	Directory:
						Drawing reference: PE.C.NOR.TTX80.V01			ERP reference: TTX80		Distributed to: