

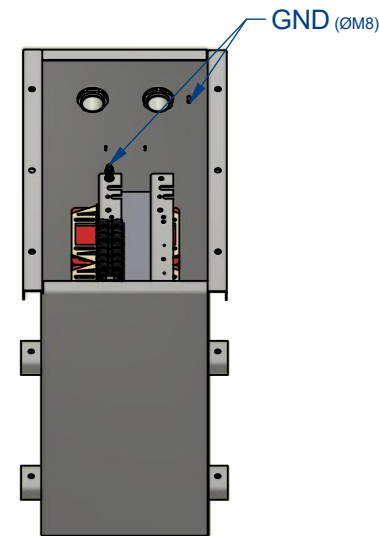
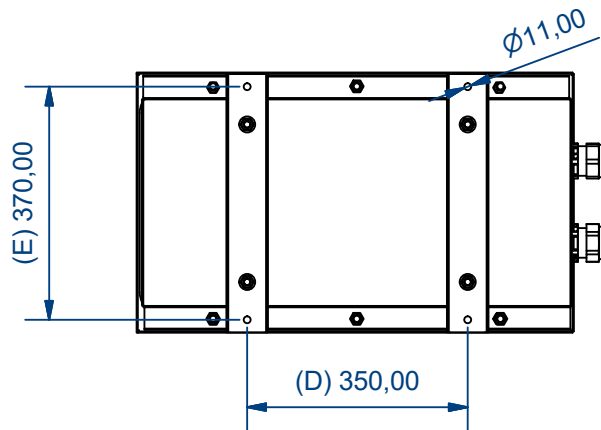
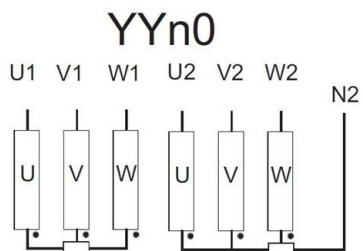
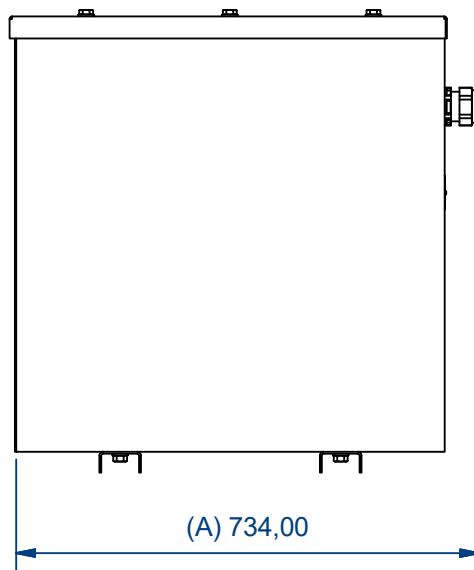


Connection (1/2)

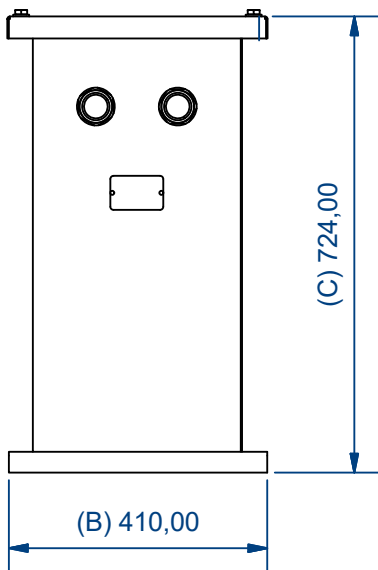

(1/20)

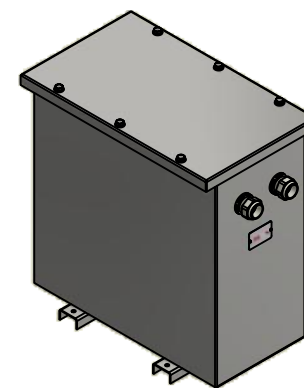

Characteristics										
IP	Vector Group	Rated power	Voltage Pri.	In Pri.	Pri. Connection	Voltage Sec.	In Sec.	Sec. Connection	Ground connection	
54	Yyn0	12.5 kVA	400 V	18.1 A	Terminal M6 Max. width =16mm	400 V	18.1 A	Terminal M6 Max. width =16mm	M8 Brass Stud	
Drawn by: SB-21/03/2023		Modified by: -		Approved by: MMB-21/03/2023		Replaces: -		Material:		
							Surface treatment: N/D		Weight: 67,431 kg	Valid: Yes
							Description: TTZ 12,5 Drawing		Units: mm	
Drawing reference: PE.C.NOR.TTZ12.5.V01				ERP reference: TTZ 12,5		Distributed to:		Technical D.		Scale: 1 / 12
						Commercial D.		Customers		Page: 1 / 1