

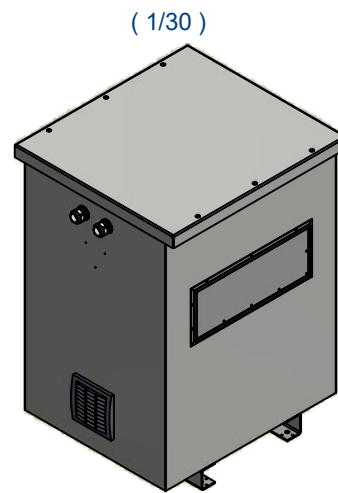
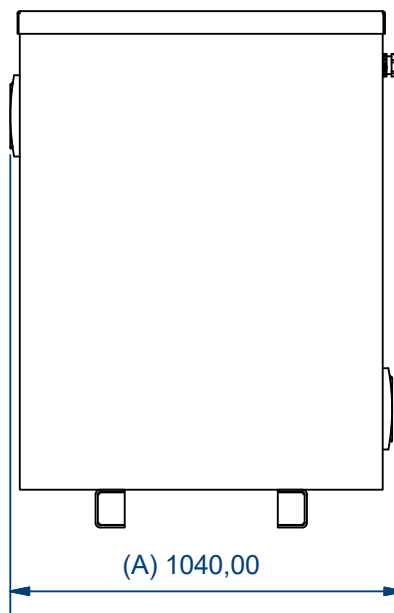
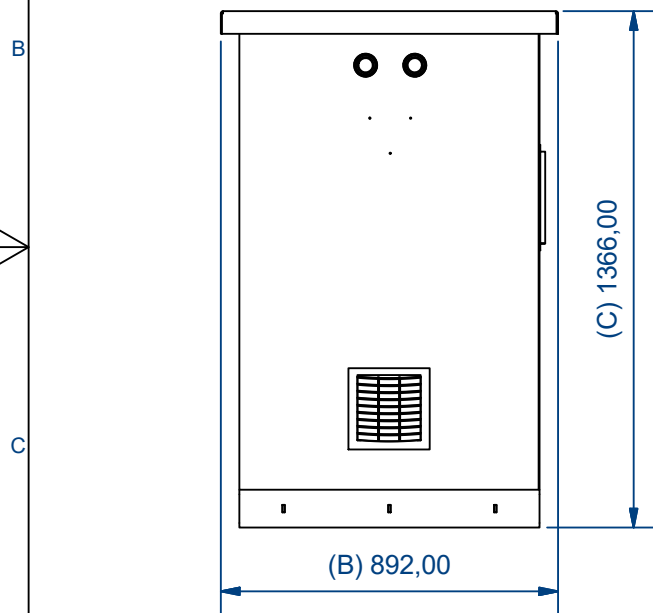
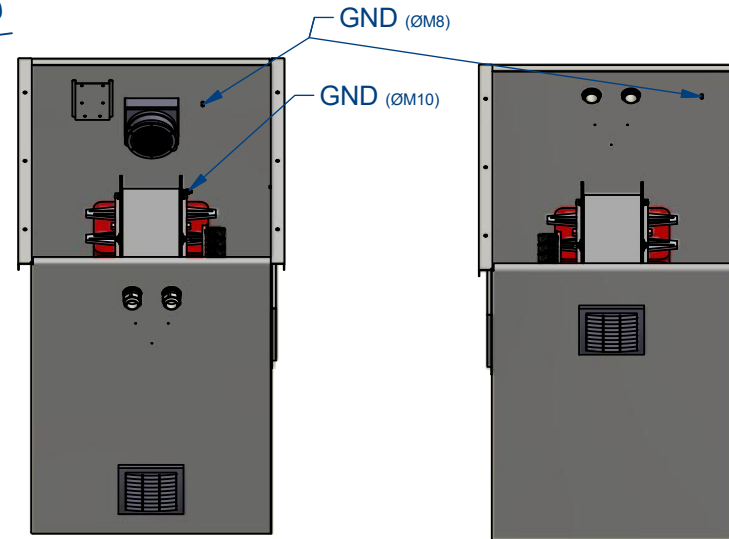


Connection (1/4)

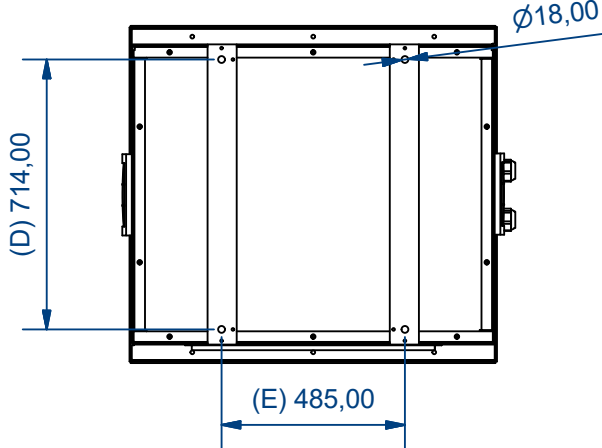

Characteristics											
IP	Vector Group	Rated power	Voltage Pri.	In Pri.	Pri. Connection	Voltage Sec.	In Sec.	Sec. Connection	Ground connection		
54	YYN0	160 kVA	400 V	230,94 A	M12 Terminal Max. Width 37 mm	400 V	230,94 A	M12 Terminal Max. Width 37 mm	M10 Brass stud		
Drawn by: OPS-12/12/2023		Modified by: -		Approved by: AMR-12/12/2023		Replaces:		Material: Generic	Surface treatment: N/D	Weight: N/D	Valid:
						Description: TTZ160 Drawing				Directory:	
						Drawing reference: PE.C.NOR.TTZ160.V01			ERP reference: TTZ160		Distributed to: