

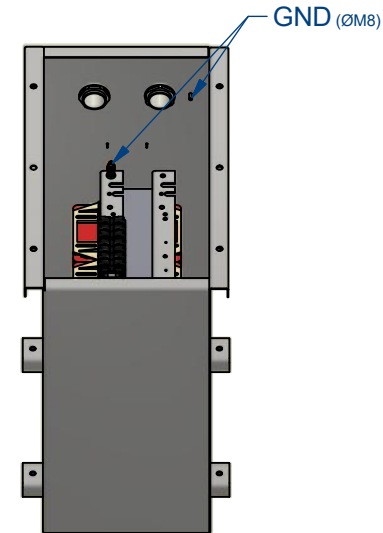
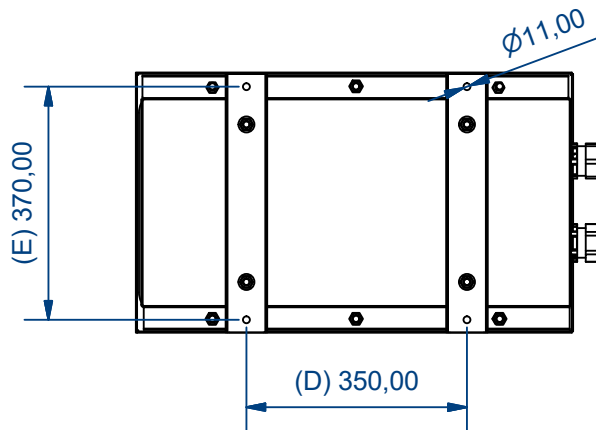
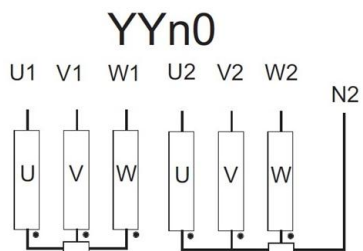
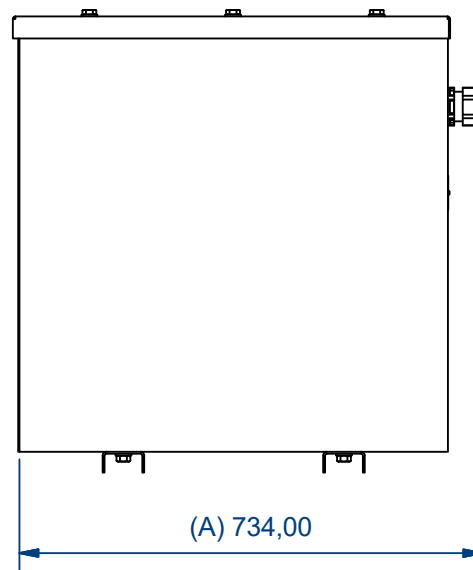


Connection ( 1/2 )

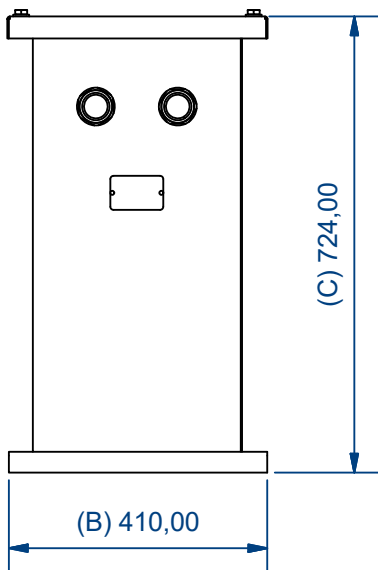

( 1/20 )

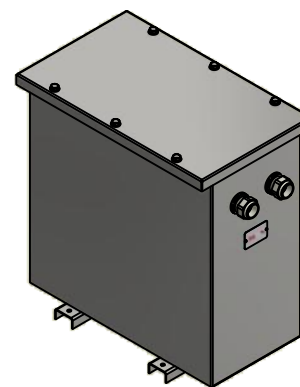

Characteristics											
IP	Vector Group	Rated power	Voltage Pri.	In Pri.	Pri. Connection	Voltage Sec.	In Sec.	Sec. Connection	Ground connection		
54	Yyn0	20 kVA	400 V	28,9 A	Terminal M6 Max. width =16mm	400 V	28,9 A	Terminal M6 Max. width =16mm	M8 Brass Stud		
Drawn by: SB-21/03/2023		Modified by: -		Approved by: MMB-21/03/2023		Replaces: -		Material:			
							Surface treatment: N/D		Weight: 67,431 kg	Valid: Yes	
							Description: TTZ 20 Drawing		Units: mm		Directory:
Drawing reference: PE.C.NOR.TTZ20.V02				ERP reference: TTZ 20		Distributed to:		Technical D. Commercial D.		Scale: 1 / 12	Page: 1 / 1