

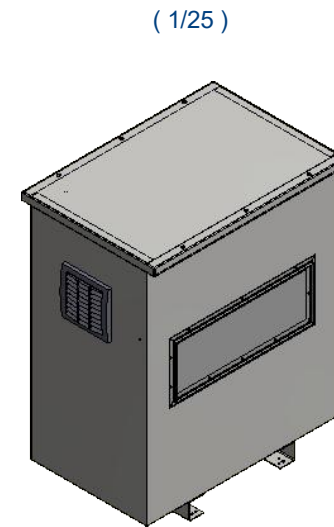
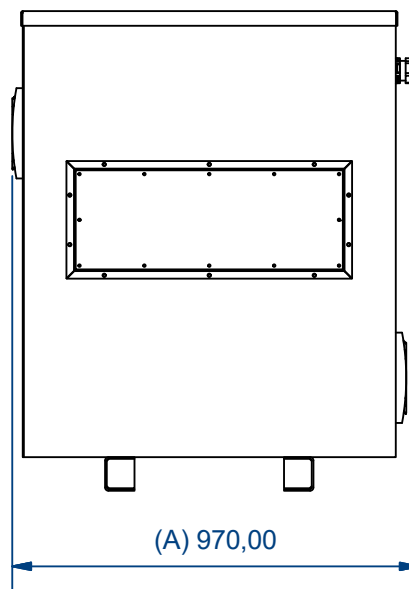
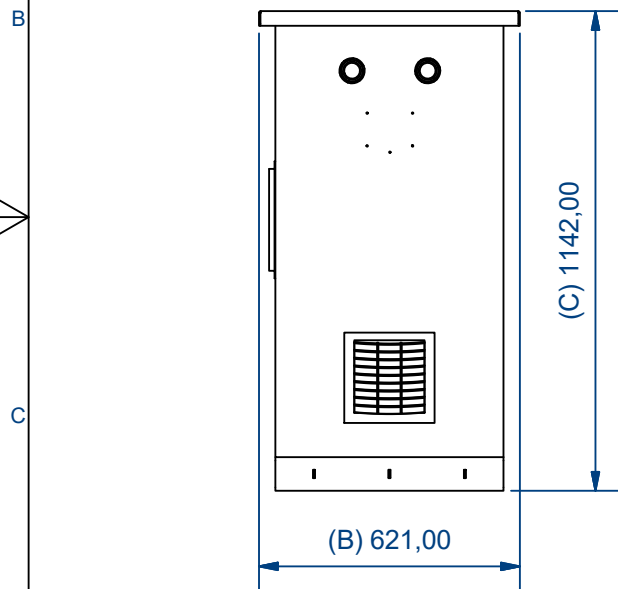
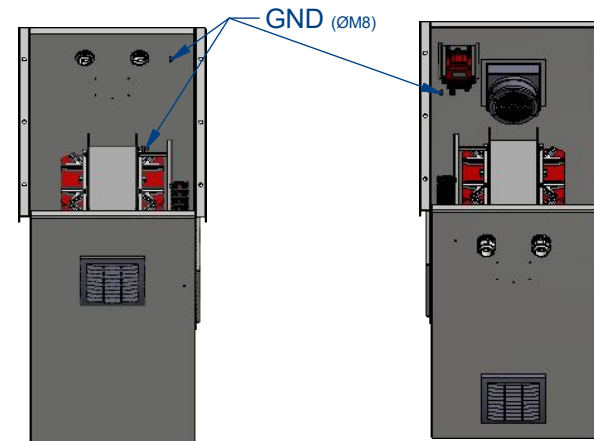


Connection (1/2)

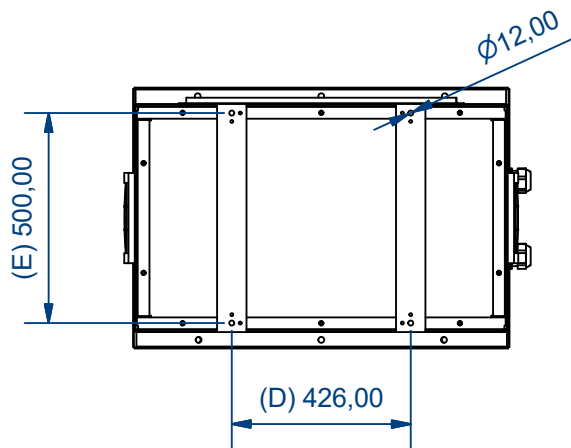

Characteristics											
IP	Vector Group	Rated power	Voltage Pri.	In Pri.	Pri. Connection	Voltage Sec.	In Sec.	Sec. Connection	Ground connection		
54	YYN0	40kVA	400 V	57,7 A	M6 Terminal Max. Width 16 mm	400 V	57,7 A	M6 Terminal Max. Width 16 mm	M8 Brass stud		
Drawn by: OPS-12/12/2023		Modified by: -		Approved by: AMR-12/12/2023		Replaces:		Material: Generic	Surface treatment: N/D	Weight: N/D	Valid:
			Description: TTZ40 Drawing						Units: mm	Directory:	
			Drawing reference: PE.C.NOR.TTZ40.V01			ERP reference: TTZ40		Distributed to:	Technical D.	Customers	Scale: 1 / 18