

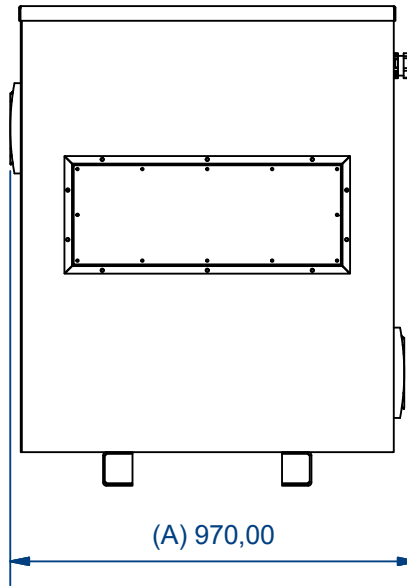
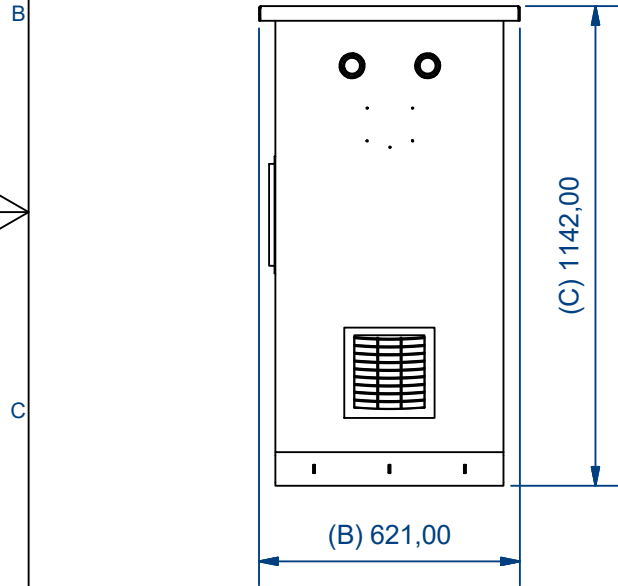
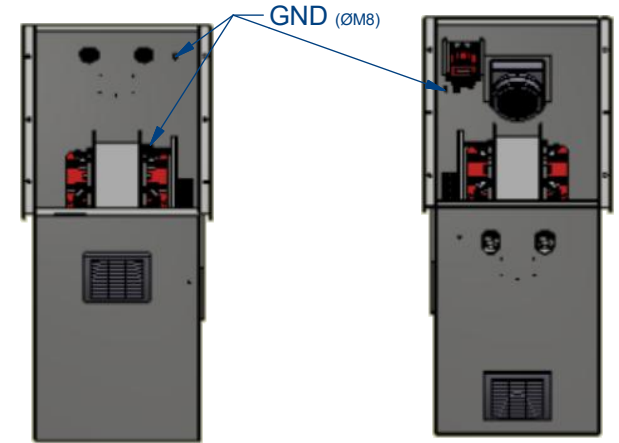
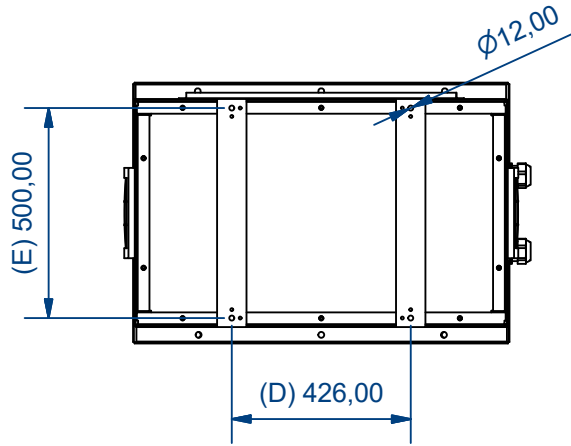


Connection (2/7)



(1/25)

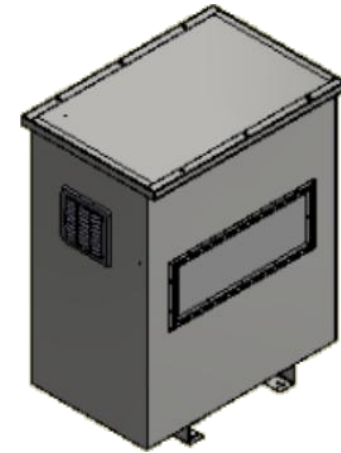

Characteristics									
IP	Vector Group	Rated power	Voltage Pri.	In Pri.	Pri. Connection	Voltage Sec.	In Sec.	Sec. Connection	Ground connection
54	YYN0	80 kVA	400 V	115,47 A	M10 Terminal Max. Width 30 mm	400 V	115,47 A	M10 Terminal Max. Width 30 mm	M8 Brass stud
Drawn by: OPS-12/12/2023		Modified by: -		Approved by: AMR-12/12/2023		Replaces:		Material: Generic	
							Surface treatment: N/D		Weight: N/D
							Description: TTZ80 Drawing		Units: mm
Drawing reference: PE.C.NOR.TTZ80.V01				ERP reference: TTZ80		Distributed to:		Technical D.	Scale: 1 / 18
						Commercial D.		Customers	Page: 1 / 1