


# 1. Single phase autotransformers for voltage changing

PAU | QAU | AUKW | AUR FAMILY > QAU200

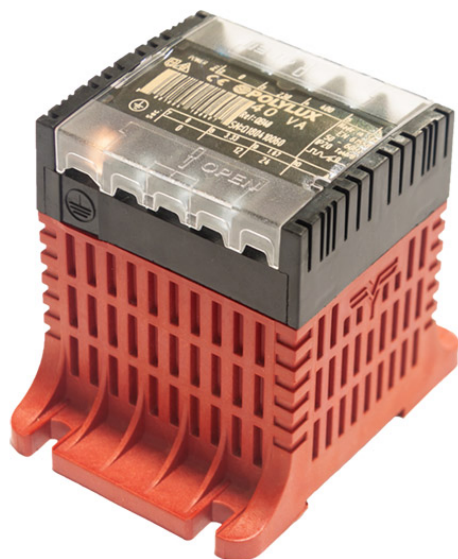

## Features

Dry type resin cast autotransformer

Advantages of resin technology:

- Protection against corrosive environments
- Protection against high vibration levels
- Protection against electrodynamic efforts
- Reduction of noise level
- Increase of product's lifespan

IP-20 enclosure:

- Last generation V-0 fireproof polymer box according to UL94 up to 2500 VA
- Polyester resin from 3150 VA

Safety class I, convertible in class II up to 2500 VA


Includes LED functioning indicator

Optional protection fuse

Possibility of tailor-made manufacturing

## Technical Characteristics

|                     |                         |
|---------------------|-------------------------|
| Rating              | 200 VA                  |
| Input voltage       | 400 V                   |
| Output voltage      | 230 V                   |
| Frequency           | 50/60 Hz                |
| Protection degree   | IP-20                   |
| Cooling             | ANAN                    |
| Ambient temperature | 40°C                    |
| Temperature rise    | Class B                 |
| Insulation          | Class B - 130°C         |
| Windings            | Class HC - 220°C        |
| Test voltage        | 3 kV (1 min, 50 Hz)     |
| Standards           | IEC/EN/UNE-EN 61558, CE |
| Mounting            | Screws and DIN Rail     |
| Weight              | 1,4 kg                  |
| Dimensions          | 84x101x98x88x55 mm 5Ø   |

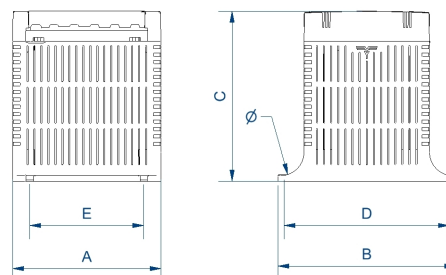

+ Info [www.polylux.com](http://www.polylux.com)

Productos equivalentes