

1. Single phase transformers for medical electrical installations.



TH FAMILY > THW3150



Features

Dry type transformer

Anti-flash varnish finish, offering:

Protection against corrosive environments

Increase of electrical isolation

High compression capacity

Reduction of noise level

Increase of product's lifespan

Metallic box IP-23 enclosure painted with epoxy polyester resin RAL 7035 (cat. C2 ISO 12994-2)

Safety class I


Includes electrostatic screen between primary and secondary terminals and bimetallic temperature sensor

Includes also lifting eyebolts from X VA

Possibility of tailor-made manufacturing

Technical Characteristics

Rating	3150 VA
Input voltage	232 V
Output voltage	115-0-115 V
Frequency	50/60 Hz
Protection degree	IP-23
Cooling	ANAN
Ambient temperature	40°C
Temperature rise	Class F
Insulation	Class F - 155°C
Windings	Class HC - 220°C
Leakage current	3,5 kV (1 min, 50 Hz)
No load voltage	3 %
Leakage current	0,5 mA (sec-earth)
Standards	IEC/EN/UNE-EN 61558-2-15, CE
Weight	34,7 Kg
Dimensions	454x340x525x300x300 mm 12Ø

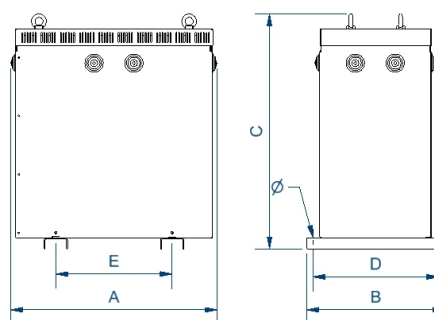

+ Info www.polylux.com

Productos equivalentes